

DATA SHEET


# CANHEAD

## SPECIAL FEATURES

- 10-channel amplifier modules for installation close to measuring points
- Measured data transmission to communication master via field bus
- Base modules for individual SGs, SG full and half bridges, DC voltage sources
- Suitable for unlimited cascading
- Uniform amplifier module for all base module types
- Connection of amplifier module/base module by simply plugging in



## DISTRIBUTED MEASUREMENT ACQUISITION

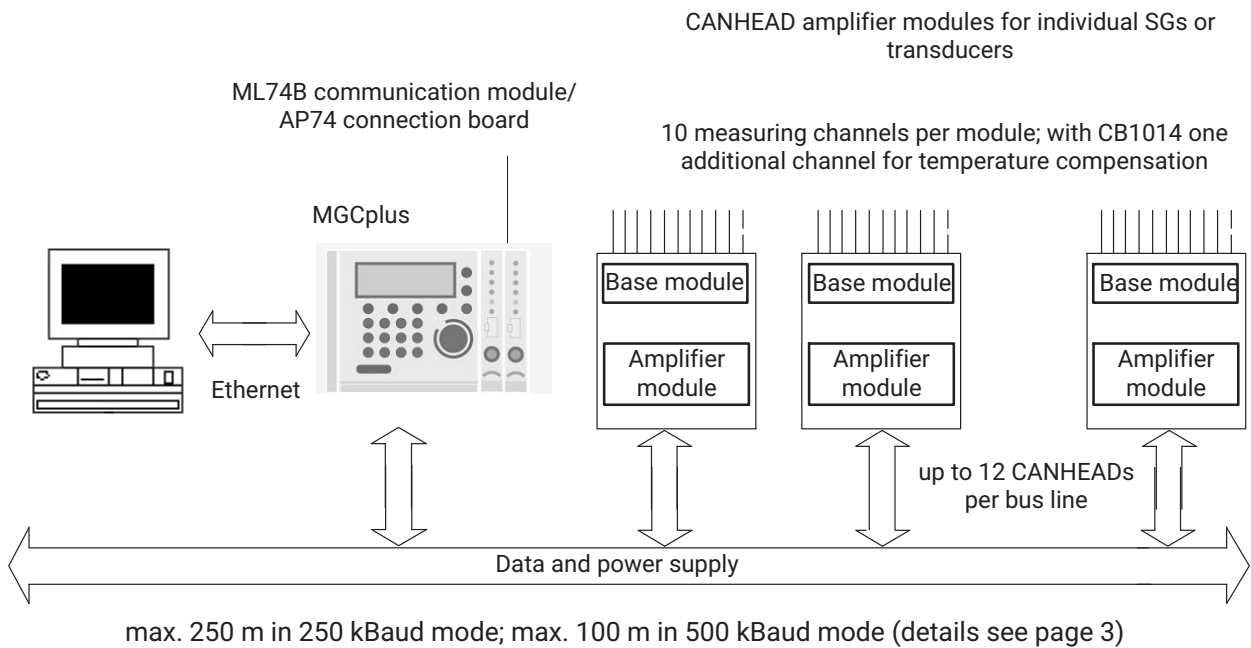

## SPECIFICATIONS

Amplifier module								
Type		CA1030						
Accuracy class		0.1						
Carrier frequency		600.15 ±0,06 (synchronised)						
Number of measurement channels		10 (plus 1 compensation channel)						
Bridge excitation voltage <sup>1)</sup>	V	0.5	1.0	2.5				
Measuring ranges	mV/V	20	10	4				
Sampling rates <sup>2)</sup>	S/s	1; 2; 5; 10; 20; 25; 30; 37.5; 50; 60; 75; 100; 150; 200; 300						
Filter type: Bessel; extended filters from firmware version P5.18, see table „Filter extensions“, last page		Nom. value (Hz)	-3 dB (Hz)	-1 dB (Hz)	Delaytime (ms)	Internal Sampling rate <sup>3)</sup> (Hz)		
		25	23.2	13.1	13.3	300		
		10	10.43	5.94	33.3	300		
		5	5.08	2.90	76.7	150		
		2.5	2.523	1.439	163.3	75		
		1.25	1.259	0.718	336.6	37.5		
		0.6	0.6297	0.359	683.3	18.75		
		0.15	0.1623	0.0910	1712	300		
		0.08	0.0811	0.0455	3411	300		
0.04	0.0406	0.0227	6814	150				
Additional phase delay resulting from CAN bus data transmission, depending on the number of CANHEADs assigned on the ML74B.	Number	1	2	3	4	5	6	7-12
	ms	6.67	13.33	20.0	26.7	33.3	40.0	80.0
Noise Filter <sup>4)</sup> Noise, typ. (peak-peak) of the measuring range	Hz	25	10	5	2.5	1.25		
	%	0.015	0.009	0.006	0.004	0.003		
Power supply (electrically isolated in the amplifier)	V	10...36						
Insulation resistance (supply to SG connection, CAN bus or housing)	V	50						
Power consumption	Module (without SGs)	W						
	Module with max. SG count	W						
CAN bus interface								
Baud rate	kBaud	250 or 500						
Bus length, max. (see table on next page, bottom)	m	250 or 100						
Number of base modules on the bus, max.		12 (=120 channels)						
Synchronization		all the bus nodes are synchronized phase-locked with defined CAN messages						
Insulation resistance		50						

<sup>1)</sup> When using half bridge (full bridge) with CB1010 and an excitation voltage of 2.5 V, the transducer impedance must be 120 ohms (230 ohms) at least. The bridge excitation voltage is valid globally for all measurement channels in the module.

<sup>2)</sup> The data transmission rate of the CAN bus is limited to a total of 3,000 S/s (6000 S/s at 500 kBaud from CA1030 Hardware Revision 1.50). Therefore, if several CANHEADs are connected to the same bus line, the sampling rate of each individual module may be additionally limited (e.g. 5 CANHEADs correspond to 50 channels on one bus line; max. sampling rate: 60 S/s e.g. 120 S/s).

<sup>3)</sup> In the CA1030, the sampling rate on the input side is 1200 Hz. Implementation of digital filters requires a reduction of the sampling rate (through repeated averaging and subsampling). This reduced sampling rate is called "internal sampling rate".

<sup>4)</sup> When used with CB1010 in a half-bridge configuration, the noise is independent of the current filter setting; the filter frequency specification 25 Hz applies.

## SPECIFICATIONS (CONTINUED)

Mechanical system and environment		
Connection to base module		all connections via a 64-pin VG strip (DIN 61412)
Dimensions (w x l x h), approx.	mm	118 x 71 x 23
Weight, approx.	g	120
Temperature range		
Operation	°C	-30 ... + 70
Storage	°C	-30 ... + 70
Perm. rel. humidity, non-condensing	%	10 ...90
Degree of protection		not relevant, as plug-in module
Maximum configuration		
per ML74B		max. 12 CANHEADs (120 measurement channels)
per MGCplus system		
with CP42/CP52 and power supply NT030		max. 24 CANHEADs (240 measurement channels)
with CP42/CP52 and power supply NT040		max. 50 CANHEADs (500 measurement channels)

Maximum bus length in m <sup>1)</sup> (without drop lines, Thin Media Cable, 0.38 mm <sup>2</sup> , ambient temperature < 45 °C								
for quarter bridges with...	120 Ω	-	350 Ω	≥ 700 Ω				
for half bridges with...	120 Ω	-	350 Ω	≥ 700 Ω				
for full bridges with...	240 Ω	350 Ω	700 Ω	≥ 1400 Ω				
for DC voltage measurement	-	-	-	-				
Power consumption per CANHEAD <sup>2)</sup> about	1.70 W	1.35 W	1.15 W	1.00 W				
No. of CANHEADs <sup>3)</sup>	250 kBaud	500 kBaud	250 kBaud	500 kBaud	250 kBaud	500 kBaud	250 kBaud	500 kBaud
12	90 m	35 m	125 m	50 m	140 m	55 m	165 m	65 m
11	100 m	40 m	140 m	55 m	155 m	60 m	180 m	70 m
10	110 m	45 m	155 m	60 m	170 m	70 m	200 m	80 m
9	120 m	50 m	170 m	70 m	190 m	75 m	220 m	90 m
8	135 m	55 m	190 m	75 m	215 m	85 m	250 m	100 m
7	155 m	60 m	220 m	90 m	250 m	100 m	250 m	100 m
6	180 m	70 m	250 m	100 m	250 m	100 m	250 m	100 m
5	220 m	90 m	250 m	100 m	250 m	100 m	250 m	100 m
4	250 m	100 m	250 m	100 m	250 m	100 m	250 m	100 m

<sup>1)</sup> In mixed configurations the column with the smallest bus length is applicable

<sup>2)</sup> 2.5 V bridge excitation voltage (most unfavorable case)

<sup>3)</sup> Bus length computed for the case of all CANHEAD modules concentrated near the end of the bus line (most unfavorable case)

## SPECIFICATIONS (CONTINUED)

Base modules for individual SGs in quarter-bridge connection			
Type		CB1014	CB1016
		3-wire circuitry (unregulated)	4-wire circuitry
<b>Transducer</b>		Single SG	
<b>Available versions</b> Each base module is provided with internal completion resistors. The resistance value depends on the respective version.		120 Ω 350 Ω	120 Ω 350 Ω
<b>Max. connection lengths for 3-wire and 4-wire circuitry</b> as per EN IEC 61000-4-5	m	30	
<b>Related amplifier module</b>		CA1030	
<b>Number of measurement channels</b>		10 (plus 1 compensation channel)	10
<b>Selectable compensation methods</b> for all channels simultaneously, individually disconnectable or connectable		- no compensation - with compensation - with PT100 and polynomial correction	-
<b>Temperature range for PT100 compens.</b>	°C	-100 ... +200	-
<b>Shunt resistor</b> external  internal		A shunt resistor with certification that can be plugged into a plinth can be cut in to all the measuring points one after the other.  Standard misalignment 1 mV/V	
<b>Miscellaneous</b>		All the relevant channel and measuring point information is saved in non-volatile memory.	
Mechanical system and environment			
<b>CAN bus connection</b> (male and female connectors)		5-pin M12 fixed connector for data and excitation (as per the DEVICENET specification)	
<b>Amplifier installation</b>		64-pin VG socket connector strip	
<b>Measuring point connection</b>		CAGE CLAMP spring-loaded terminals for line cross-sections 0.08 ... 0.5 mm <sup>2</sup> (AWG 28...20). Plus solder pads for soldering	RJ45 shielded sockets <sup>1)</sup>
<b>Displays</b>		2 status LEDs	
<b>Enclosures</b>		Aluminum	
<b>Dimensions (w x l x h), approx.</b>	mm	182 x 131 x 40	
<b>Weight, approx.</b>	g	540 (without CA1030)	
<b>Protection system</b>		IP30	
<b>Temperature range</b> Operation	°C	-30 ... +70	
Storage	°C	-30 ... +70	
<b>Perm. rel. humidity, non-condensing</b>	%	10 ... 90	
<b>EMC compliance</b> applies with CA1030 amplifier module plugged in		per EN 61326 (if shielded cables and, if required, shielded plugs are used)	

<sup>1)</sup> For EMC reasons, we advise against using RJ11 plugs, that are electromechanically compatible, instead of shielded RJ45 plugs.

## SPECIFICATIONS (CONTINUED)


Base module for SG half and full bridges, measurement of DC sources		
Type		CB1010
<b>Accuracy class</b>	%	With strain-gage half and full bridges: 0.1 With measurement of DC voltage sources: 0.2
<b>Transducer</b> Types Excitation		Full and half bridges in regulated 6-wire circuitry, DC sources Setting of excitation voltage for full and half bridges via the measuring amplifier
<b>Voltage input</b> Measuring range	V <sub>DC</sub>	±10
Perm. common-mode voltage (channel-channel; channel housing)	V	±45
Input resistance, symmetrical	MΩ	2
<b>Connection lengths, max.<sup>1)</sup></b>	m	30
<b>Mixed operation</b>		All channels individually configurable for full bridge, half bridge or 10 V <sub>DC</sub>
<b>T-ID/TEDS</b>		For full and half bridge in zero-wire technology With voltage signals, connection to separate cable cores is required
<b>Related amplifier module</b>		CA1030 <sup>2)</sup>
<b>Number of measurement channels</b>		10
<b>Power consumption</b>	W	< 0.1 (without transducer and without measuring amplifier)
<b>Miscellaneous</b>		All the relevant channel and measuring point information is saved in a non-volatile memory
Mechanical properties and environment		
<b>CAN bus connection</b> (male and female connectors)		5-pin M12 fixed connector for data and supply (as per the DEVICENET specifications) Electrical isolation between CAN bus and supply
<b>Amplifier installation</b>		64-pin VG socket connector strip
<b>Measuring point connection</b>		RJ45 shielded sockets
<b>Displays</b>		2 status LEDs
<b>Enclosures</b>		Aluminum
<b>Dimensions (w x l x h), approx.</b>	mm	182 x 131 x 40
<b>Weight, approx.</b>	g	540 (without CA1030)
<b>Protection system</b>		IP 20
<b>Temperature range</b> Operation	°C	-30 ... +70
Storage	°C	-30 ... +70
<b>Perm. rel. humidity, non-condensing</b>	%	10 ... 90
<b>EMC compliance</b> , applies for all base modules with plugged in CA1030 amplifier module		per EN 61326 (if shielded cables and shielded plugs are used)

<sup>1)</sup> As per EN IEC 61000-4-5

<sup>2)</sup> Required hardware revision: 1.20 or higher


Documentation for the CANHEAD system with ML74B and AP74 is included on the MGC system CD.

## PIN ASSIGNMENT CB1014

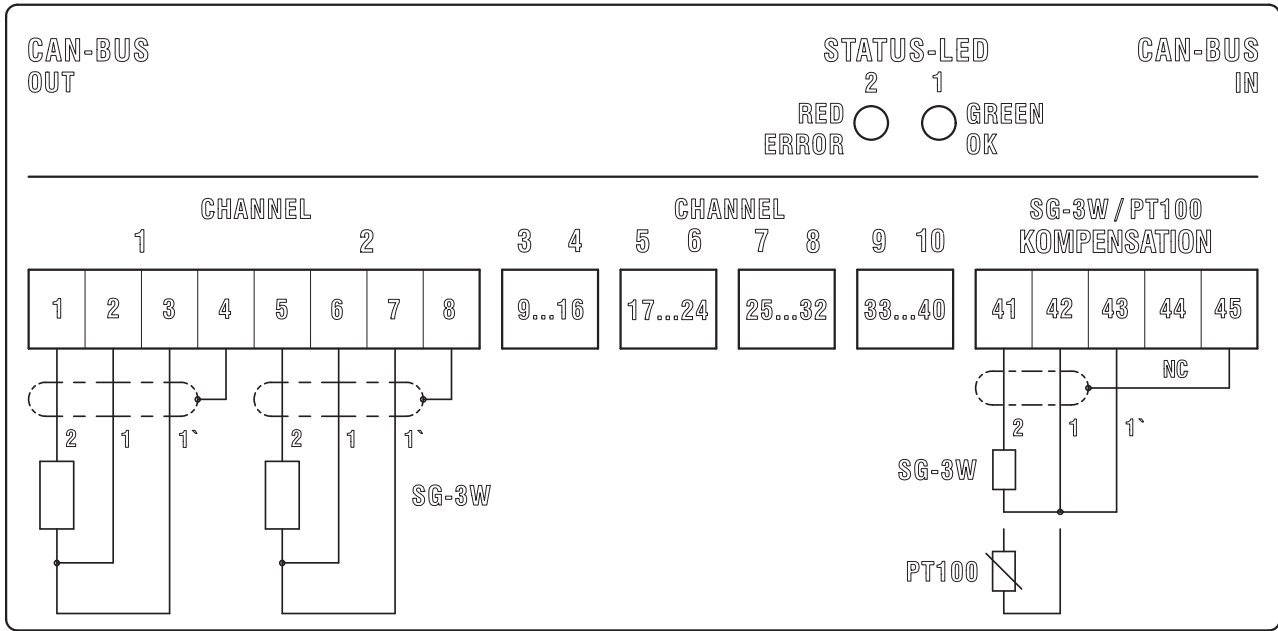


CB1014 assignment (three-wire circuit)

## PIN ASSIGNMENT CB1016

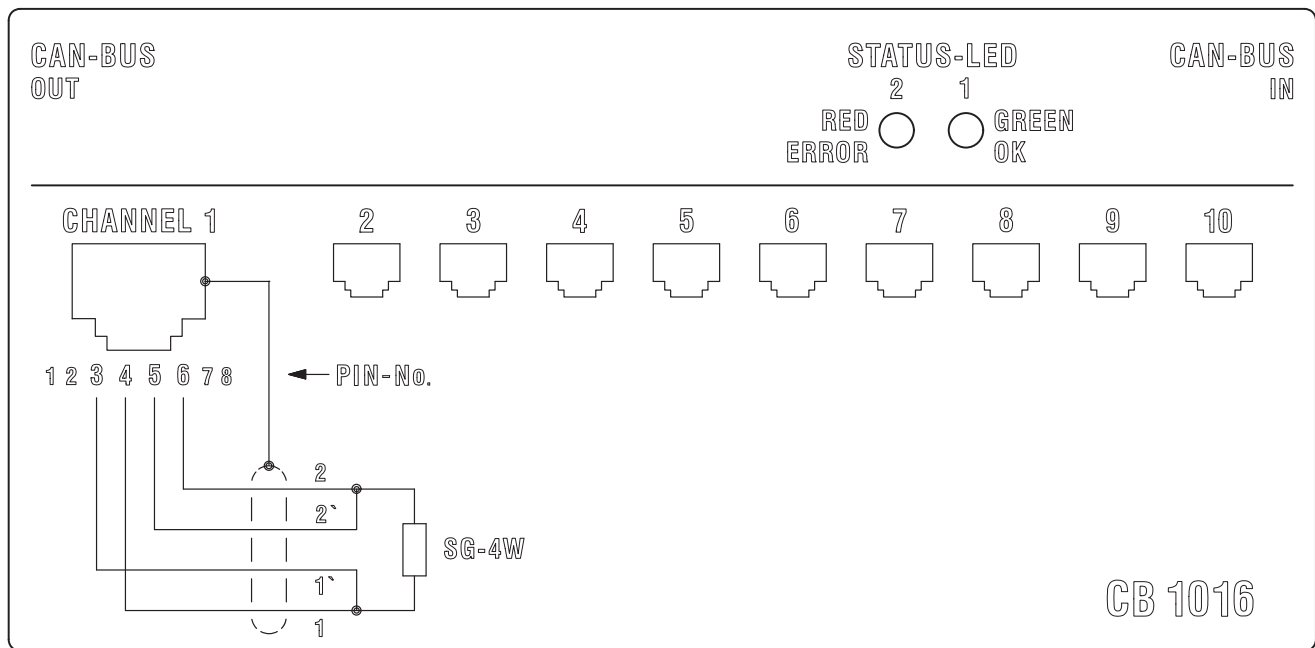

CB1016 assignment (four-wire circuit)

## PIN ASSIGNMENT CB1010

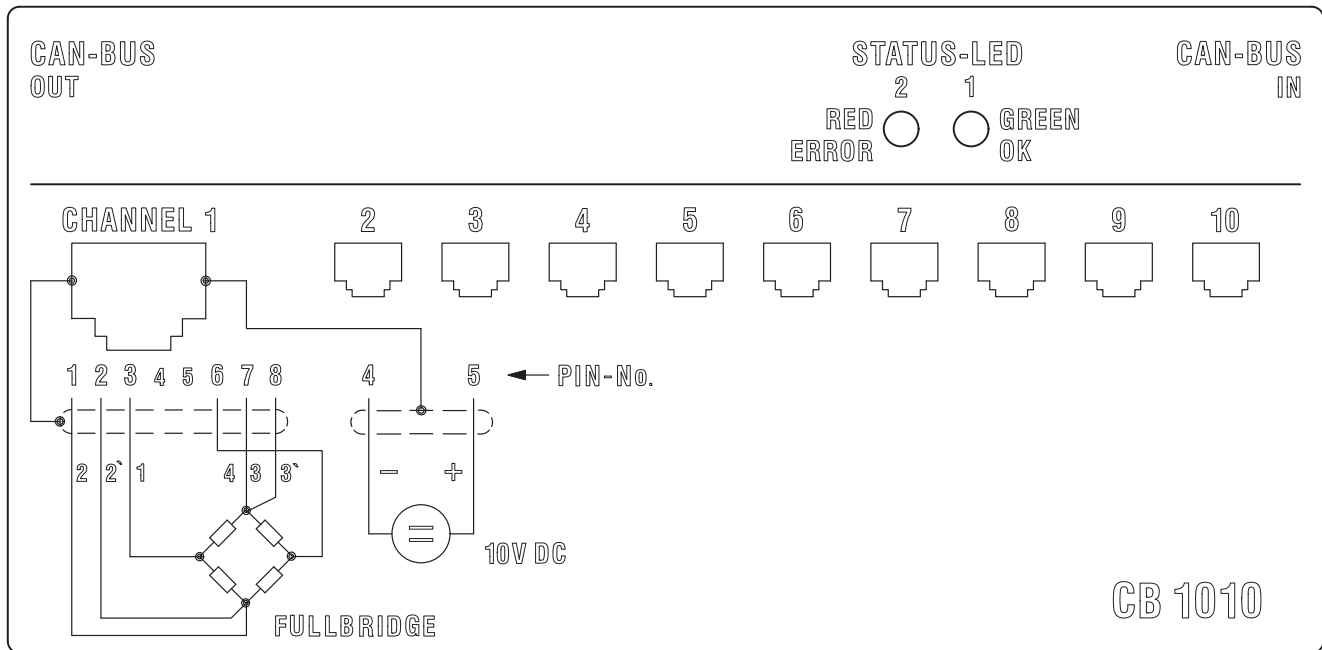

### Full bridge and DC connector assignment

in a half-bridge configuration the same assignment applies as in a full-bridge configuration, though wire 4 is omitted, meaning pin 6 is disabled.

## TABLE OF TYPES

Amplifier module: CA1030

Base module

Completion resistor (Ω)	Quarter bridge / 3-wire	Quarter bridge 4-wire	Half and full bridges, DC voltage sources
	Terminal connector	RJ45 connector	
-	-	-	CB1010
120	CB1014-120	CB1016-120	-
350	CB1014-350	CB1016-350	-

## SCOPE OF SUPPLY

- Base or amplifier module
- Mounting instructions
- With CB1014: 11 cable bushings each Ø5.2 mm and 7.5 mm

## ACCESSORIES, TO BE ORDERED SEPARATELY

CAN bus	Order number
2 m connection cable	1-KAB267-2 (Devicenet cable, with integral connectors for setting up a CAN line)
M12 male and female connector	1-CANHEAD-M12
Cable by the meter	4-3301.0180
T-piece	1-CANHEAD-M12-T
M12 CAN termination resistor	1-CANHEAD-TERM
ML74B	1-ML74B (see documentation for MGCplus)
AP74	1-AP74 (see documentation for MGCplus)

Measuring point connection for CB1010	Order number
Connection cable with loose ends and 8-pin RJ45 connector, 3 m long	1-KAB156-3
Adapter cable (RJ45/D-Sub 15-pin)	1-KAB417

## FILTER EXTENSIONS

Complete filters with 250 kBaud and 500 kBaud from firmware version P5.18

Nom. Value (Hz)	-3 dB (Hz)	-1 dB (Hz)	Delay time (ms)	Sampling rate (S/s)
25	23.2	13.1	13.3	300
15	15.5	8.8	20.0	200
10	10.43	5.94	33.3	300
7	6.952	3.949	50.0	200
5	5.08	2.9	76.7	150
3	3.386	1.930	115.1	100
2.5	2.523	1.439	163.3	75
1.5	1.682	0.959	245.0	50
1.25	1.259	0.718	336.6	37.5
0.8	0.840	0.479	504.9	25
0.6	0.697	0.359	683.3	18.75
0.4	0.120	0.240	1025	12.5
0.15	0.1623	0.0910	1712	300
0.1	0.108	0.061	2568	200
0.08	0.0811	0.0455	3411	300
0.05	0.0542	0.0304	5116	200
0.04	0.0406	0.0227	6814	150
0.025	0.0271	0.0152	10221	100

### Hottinger Brüel & Kjaer GmbH

Im Tiefen See 45 · 64293 Darmstadt · Germany  
 Tel. +49 6151 803-0 · Fax +49 6151 803-9100  
 www.hbkworld.com · info@hbkworl.com

Subject to modifications. All product descriptions are for general information only. They are not to be understood as a guarantee of quality or durability.