

DATA SHEET


QuantumX MX1616B Strain gauge bridge amplifier

SPECIAL FEATURES

- 16 individually configurable inputs
- Connection of strain gauges in full-, half- and quarter-bridge (350 or 1,000 Ohm)
- Bridge excitation : DC or carrier frequency
- Internal shunt resistor, selectable
- Universal connection of voltage, resistance thermometer, resistor, potentiometer
- Individual data rates up to 20 kS/s per channel, active low pass filter
- 24-bit A/D converter per channel for synchronous, parallel measurements



BLOCK DIAGRAM

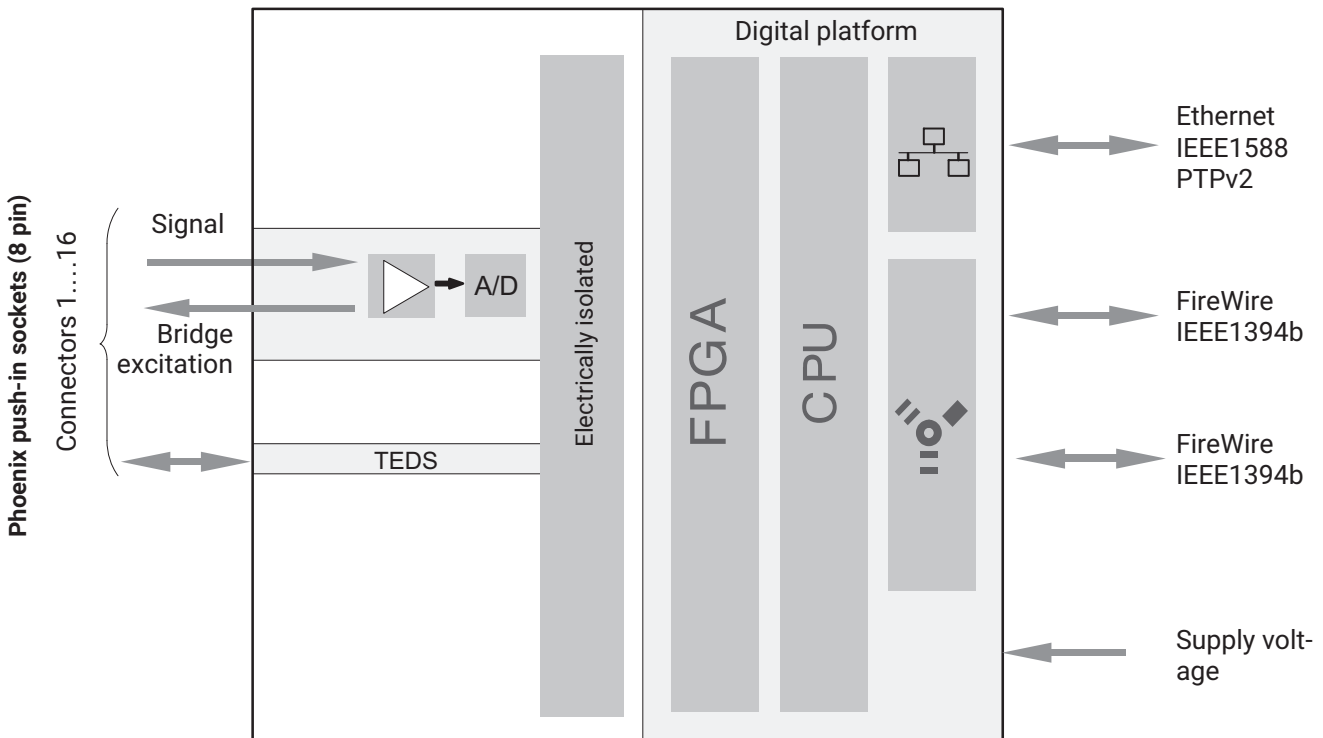

SPECIFICATIONS MX1616B

General specifications								
Inputs	Number	16, electrically isolated from the supply						
Transducer technologies, can be adjusted individually		Strain gauges in full-, half- or quarter-bridge configuration (selectable internal 350 or 1000 ohm completion resistor) Selectable bridge excitation voltage : voltage or carrier frequency with 1,200/1,250 Hz						
		<table border="1"> <tr> <td>SG-quarter bridges</td> <td>3-wire and 4-wire circuit</td> </tr> <tr> <td>SG-half bridges</td> <td>5-wire circuit</td> </tr> <tr> <td>SG-full bridges</td> <td>6-wire circuit</td> </tr> </table>	SG-quarter bridges	3-wire and 4-wire circuit	SG-half bridges	5-wire circuit	SG-full bridges	6-wire circuit
	SG-quarter bridges	3-wire and 4-wire circuit						
	SG-half bridges	5-wire circuit						
	SG-full bridges	6-wire circuit						
	Resistor, Resistance thermometer (Pt100, Pt500, Pt1000 - only one type per module)							
	Potentiometric transducers							
	Voltage (± 10 V differential, 0 ... 30 V unipolar) without transducer supply							
A/D converter per channel	-	24 Bit Delta Sigma converter						
Sample rates (Domain adjustable by software, Factory setting is HBM Classic)	S/s	Decimal: 0.1 ... 20,000 HBM Classic: 0.1 ... 19,200						
Bandwidth	Hz	3000 (-3 dB) with Linear Phase filter, 400 using carrier frequency and bessel filter						
Active low-pass filter	-	Bessel, Butterworth, linear phase 0.01 ... 3000 (-3 dB), digital Filter OFF						
Transducer identification (TEDS, IEEE 1451.4) max. distance of the TEDS module	m	100						
Transducer connection		Phoenix Contact FMC-1,5/8-ST-3,5-RF push-in terminal Plug included						
Supply voltage range (DC)	V	10 ... 30 (24 V nominal (rated) voltage)						
Supply voltage interruption		max. 5 ms at 24 V						
Power consumption	W	< 12						
Ethernet (data link) Protocol(addressing) Connection Max. cable length to module	- - - m	10Base-T/100Base-TX TCP/IP (static IP/DHCP, IPv4/IPv6) 8P8C plug (RJ-45) with twisted pair cable (CAT-5) 100						
Synchronization options EtherCAT ^{®1)} IRIG-B (B000 to B007; B120 to B127) IEEE1588 (PTPv2), NTP PROFINET		IEEE1394b FireWire (only QuantumX, SomatXR) via CX27C via MX440B - or MX840B input channel Ethernet based Time Sync Protocol						
IEEE1394b FireWire (module synchronization, data link, optional supply voltage) Baud rate Max. current from module to module Max. cable length between the nodes Max. number of modules connected in series (daisy chain) Max. number of modules in a IEEE1394b FireWire system (including hubs ²⁾ , backplane) Max. number of hops ³⁾	MBAud A m - - -	IEEE 1394b (HBM modules only) 400 (approx. 50 MByte/s) 1.5 5 12 (=11 hops) 24 14						
Nominal (rated) temperature range	°C [°F]	-20 ... +65 [-4 ... +149]						
Storage temperature range	°C [°F]	-40 ... +75 [-40 ... +167]						
Rel. humidity	%	5 ... 95 (non condensing)						

1) EtherCAT[®] is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany

2) Hub: IEEE1394b FireWire node or distributor

3) Hop: Transition from module to module or signal conditioning / distribution via IEEE1394b FireWire (hub, backplane)

Protection class	-	III ⁵⁾
Degree of protection	-	IP20 per EN 60529
Mechanical tests⁴⁾ Vibration (30 min) Shocking (6 ms)	m/s ² m/s ²	50 350
EMC requirements		per EN 61326-1
Max. input voltage at transducer socket to ground, transient free Pin 6 and 7 to Pin 1, 2, 3, 4 or 5	V	±18
Dimensions, horizontal (H x W x D)	mm	52.5 x 200 x 122 (with case protection) 44 x 174 x 119 (without case protection)
Weight, approx.	g	980
Strain gauge full or half bridge, Bridge excitation :carrier frequency		
Accuracy class	-	0.05 ⁶⁾
Carrier frequency (square)	Hz	Decimal: 1,250 ±2 HBM Classic: 1,200 ±2
Bridge excitation voltage (AC, effective)	V	1; 2.5; 5 (±5 %)
Transducers that can be connected		Strain gauge full and half bridges
Permissible cable length between MX1616B and transducer	m	< 100
Measuring ranges at 5 V excitation at 2.5 V excitation at 1 V excitation	mV/V mV/V mV/V	±4 ±8 ±20
Additional shunt resistor can be activated (control signal)	kΩ	100±0.1% ⁷⁾ (typ. - 0.886 mV/V at 350 Ω)
Measurement frequency range (-3 dB)	Hz	0 ... 400
Transducer impedance at 5 V excitation at 2.5 V excitation at 1 V excitation	Ω Ω Ω	300 ... 1,000 110 ... 1,000 80 ... 1,000
Noise (peak to peak) at 25 °C and 2.5 V excitation with filter 1 Hz Bessel with filter 10 Hz Bessel with filter 100 Hz Bessel	μV/V μV/V μV/V	< 0.2 < 0.5 < 1.5
Linearity error	%	< 0.02 of full scale
Zero drift (Full bridge with 5 V excitation)	%/10 K	< 0.01 of full scale
Full-scale drift (5 V excitation)	%/10 K	< 0.05 of measurement value

4) Mechanical stress is tested according to European Standard EN60068-2-6 for vibrations and EN60068-2-27 for shock. The equipment is subjected to an acceleration of 50 m/s² in a frequency range of 5...65 Hz in all 3 axes. Duration of this vibration test: 30min per axis. The shock test is performed with a nominal acceleration of 350 m/s² for 6 ms, half sine pulse shape, with 3 shocks in each of the 6 possible directions.

5) The DC voltage supply must meet the requirements of IEC 60950-1 on a SELV voltage supply.

6) Due to the higher zero error, the accuracy class of half bridge strain gages is 0.5. The more important linearity deviation remains < 0.02%.

7) When using a half bridge, the shunt resistor may only be used when signals 1 (Pin 6) and 4 (Pin 7) are bridged (in this case, control signal: typ. + 0.873 mV/V at 350 Ω).

Strain gauge full or half bridge, Bridge excitation : DC voltage		
Accuracy class	-	0.1 ⁸⁾
Bridge excitation voltage (DC)	<	1; 2.5; 5; (± 5 %)
Transducers that can be connected		strain gauge half and full bridges
Permissible cable length between MX1616B and transducer	m	< 100
Measuring ranges		
at 5 V excitation	mV/V	± 4
at 2.5 V excitation	mV/V	± 8
at 1 V excitation	mV/V	± 20
Additional shunt resistor can be activated (control signal)	k Ω	100 \pm 0.1% ⁹⁾ (typ. - 0.886 mV/V at 350 Ω)
Measurement frequency range (-3 dB)	Hz	0 ... 3,000
Transducer impedance		
at 5 V excitation	Ω	300 ... 1,000 ¹⁰⁾
at 2.5 V excitation	Ω	110 ... 1,000 ¹⁰⁾
at 1 V excitation	Ω	80 ... 1,000 ¹⁰⁾
Noise (peak to peak) at 25 °C and 2.5 V excitation		
with filter 1 Hz Bessel	μ V/V	< 0.2
with filter 10 Hz Bessel	μ V/V	< 0.4
with filter 100 Hz Bessel	μ V/V	< 1
with filter 1 kHz Bessel	μ V/V	< 3
Linearity error	%	< 0.02 of full scale
Zero drift (Full bridge with 5 V excitation)	%/10 K	< 0.1 of full scale
Full-scale drift (5 V excitation)	%/10 K	< 0.05 of measurement value

⁸⁾ Due to the higher zero error, the accuracy class of half bridge strain gages is 0.2. The more important linearity deviation remains < 0.02%.

⁹⁾ When using a half bridge, the shunt resistor may only be used when signals 1 (Pin 6) and 4 (Pin 7) are bridged (in this case, control signal: typ. + 0.873 mV/V at 350 Ω).

¹⁰⁾ A higher transducer impedance is possible (< 5000 Ω). This merely results in a higher zero error and thus an accuracy class of 0.3.

Strain gauge single bridge, Bridge excitation : carrier frequency ¹¹⁾		
Accuracy class	-	0.1 ¹²⁾
Carrier frequency (square)	Hz	Decimal: 1,250 \pm 2; HBM Classic: 1,200 \pm 2
Bridge excitation voltage (AC, effective)	V	0.5; 1; 2.5; 5 (± 5 %)
Transducers that can be connected		SG quarter bridge in 4-wire circuit and 3-wire circuit
Permissible cable length between MX1616B and transducer	m	< 100
Measuring ranges		
at 5 V excitation	mV/V	± 4
at 2.5 V excitation	mV/V	± 8
at 1 V excitation	mV/V	± 20
at 0.5 V excitation	mV/V	± 40
Additional shunt resistor can be activated (control signal)	k Ω	100 \pm 0.1% (typ. + 0.873 mV/V at 350 Ω)
Measurement frequency range (-3 dB)	Hz	0 ... 400
Internal completion resistors	Ω	350 and 1,000
Noise ¹³⁾ (peak to peak) at 25 °C and 5 V excitation		
with filter 1 Hz Bessel	μ V/V	< 0.3
with filter 10 Hz Bessel	μ V/V	< 0.6
with filter 100 Hz Bessel	μ V/V	< 1.5
Linearity error ¹³⁾	%	< 0.05 of full scale
Zero drift ¹³⁾ (5 V excitation)	%/10 K	< 0.1 of full scale
Full-scale ¹³⁾ drift (5 V excitation)	%/10 K	< 0.1 of measurement value

¹¹⁾ 3-wire circuit with carrier frequency-based bridge excitation voltage is supported for modules as of February 2017.

¹²⁾ Accuracy class focusses on linearity. Zero point deviation is 0.5% of range.

¹³⁾ With 350 Ω resistor and connection using in four-wire circuit.

Strain gauge single bridge, Bridge excitation : DC voltage		
Accuracy class	-	0.1 ^{14), 15)}
Bridge excitation voltage (DC)	V	0.5; 1; 2.5; 5 ($\pm 5\%$)
Transducers that can be connected		SG quarter bridges in 4-wire and 3-wire circuit
Permissible cable length between MX1616B and transducer	m	< 100
Measuring ranges		
at 5 V excitation	mV/V	± 4
at 2.5 V excitation	mV/V	± 8
at 1 V excitation	mV/V	± 20
at 0.5 V excitation	mV/V	± 40
Additional shunt resistor can be activated (control signal)	k Ω	100 \pm 0.1% (typ. + 0.873 mV/V at 350 Ω)
Measurement frequency range (-3 dB)	Hz	0 ... 3,000
Internal completion resistors	Ω	350 and 1,000
Noise ¹⁶⁾ (peak to peak) at 25 °C and 5 V excitation		
with filter 1 Hz Bessel	μ V/V	< 0.4
with filter 10 Hz Bessel	μ V/V	< 0.6
with filter 100 Hz Bessel	μ V/V	< 1.5
with filter 1 kHz Bessel	μ V/V	< 3
Linearity error ¹⁶⁾	%	< 0.05 of full scale
Zero drift ¹⁶⁾ (5 V excitation)	%/10 K	< 0.1 of full scale
Full-scale ¹⁶⁾ drift (5 V excitation)	%/10 K	< 0.05 of measurement value

¹⁴⁾ With 10 V/m electromagnetic field strength (EN61000-4-3) : 0.2

The accuracy class does not take into account measurement errors resulting from asymmetrical cable resistances when using a three-wire circuit.

¹⁵⁾ Accuracy class focusses on linearity. Zero point deviation is 0.5% of range.

¹⁶⁾ With 350 Ω resistor and connection using and in four-wire circuit.

Potentiometric transducer		
Accuracy class	-	0.1
Excitation voltage (DC)	V	1 ($\pm 5\%$)
Transducers that can be connected		Potentiometric transducers (5-wire circuit)
Permissible cable length between module and transducer	m	100
Measuring range	mV/V	± 500
Measurement frequency range (-3 dB) and 2.5 V excitation	Hz	0 ... 3,000
Transducer impedance	Ω	100 ... 50,000
Noise (peak to peak) at 25 °C and 5 V excitation		
with filter 1 Hz Bessel	μ V/V	< 2
with filter 10 Hz Bessel	μ V/V	< 4
with filter 100 Hz Bessel	μ V/V	< 10
with filter 1 kHz Bessel	μ V/V	< 30
Linearity error	%	< 0.05 of full scale
Zero drift	%/10 K	< 0.1 of full scale
Full-scale drift	%/10 K	< 0.1 of measurement value

Electrical voltage ± 10 V		
Accuracy class	-	0.05
Transducers that can be connected		Voltage transmitter ± 10 V
Permissible cable length between MX1616B and transducer	m	100
Measuring range	V	± 15 differential
Measurement frequency range (-3 dB)	Hz	0 ... 3,000
Internal resistance of the connected voltage source	Ω	< 500
Input impedance (symmetrical)	M Ω	> 1.5
Noise (peak to peak) at 25 °C and 2.5 V excitation		
at 1 Hz Bessel filter	μ V	150
at 10 Hz Bessel filter	μ V	300
at 100 Hz Bessel filter	μ V	600
at 1 kHz Bessel filter	μ V	2,000
Linearity error	%	< 0.02 of full scale
Common-mode rejection		
at DC common-mode	dB	> 100
at 50 Hz common-mode, typically	dB	75
Max. common-mode voltage		
Channel from housing and supply ground	V	± 60
Channel from channel	V	± 5
Zero drift	%/10 K	< 0.03 of full scale
Full-scale drift	%/10 K	< 0.05 of measurement value

Resistance		
Accuracy class	-	0.1
Transducers that can be connected		PTC, NTC, KTY, TT-3, resistances generally (connection in 4-wire circuit)
Permissible cable length between MX1616B and transducer	m	< 100
Measuring range	Ω	0 ... 1,000 ¹⁷⁾
Excitation current	mA	0.37 ... 1.43
Measurement frequency range (-3 dB)	Hz	0 ... 3,000
Noise (peak to peak) at 25 °C and 2.5 V excitation		
with filter 1 Hz Bessel	Ω	< 0.1
with filter 10 Hz Bessel	Ω	< 0.2
with filter 100 Hz Bessel	Ω	< 0.5
with filter 1 kHz Bessel	Ω	< 1.5
Linearity error	%	< 0.05 of full scale
Zero drift	%/10 K	< 0.02 of full scale
Full-scale drift	%/10 K	< 0.1 of measurement value

¹⁷⁾ Measuring range can be modulated up to 5 k Ω , in this case: accuracy class 2


Resistance thermometer (Pt100, Pt500, Pt1000 - only one type per module)		
Accuracy class	-	0.1
Transducers that can be connected		Pt100, Pt500 or Pt1000(connection in 4-wire circuit)
Permissible cable length between MX1616B and transducer	m	< 100
Linearization range	°C [°F]	-200 ... +848 [-328 ... +1,558.4]
Excitation voltage (DC)	V	0.5 (±5 %)
Measurement frequency range (-3 dB)	Hz	0 ... 3,000
Noise (peak to peak) at 25 °C and 2.5 V excitation		
with filter 1 Hz Bessel	K	< 0.02
with filter 10 Hz Bessel	K	< 0.04
with filter 100 Hz Bessel	K	< 0.1
with filter 1 kHz Bessel	K	< 0.3
Linearity error	K	<±0.3
Zero drift	K / 10 K	< 0.2
Full-scale drift	K / 10 K	< 0.5

DECIMAL SAMPLE RATES, DIGITAL LOW PASS FILTER TYPE BESSEL 4TH ORDER

Type	-1dB (Hz)	-3dB (Hz)	-20dB (Hz)	Phase delay ^{*)} (ms)	Rise time (ms)	Overshoot (%)	Rate (S/s)
Bessel	1,203	2,000	3,830	0.113	0.189	2.10	20,000
	596	1,000	2,494	0.256	0.355	1.0	20,000
	298	502	1,278	0.581	0.701	0.9	20,000
	119	200	509	1.56	1.76	0.9	20,000
	59	100	254	3.21	3.51	0.9	20,000
	29.6	49.9	127.1	6.50	7.01	0.9	20,000
	11.8	20.0	50.8	16.4	17.6	0.9	20,000
	5.9	10.0	25.4	32.9	35.1	0.9	20,000
	2.96	4.99	12.70	69.0	70.1	0.9	10,000
	1.18	2.00	5.08	168	176	0.9	10,000
	0.59	1.00	2.54	333	351	0.9	5,000
	0.295	0.498	1.271	663	701	0.9	1,000
	0.118	0.200	0.508	1,660	1,760	0.9	1,000
	0.059	0.100	0.254	3,300	3,510	0.9	500
	0.0295	0.0498	0.1271	6,620	7,010	0.9	100
	0.0118	0.0200	0.0508	16,500	17,600	0.9	100
0.0059	0.0100	0.0254	33,000	35,100	0.9	50	

*) The analog-to-digital converter's delay time is 128 μ s for all data rates and has not been accounted for in the "Phase delay" column! The anti-aliasing filter's delay time (160 μ s) is not accounted for as well. Hence, 288 μ s need to be added to the "Phase delay".

DECIMAL SAMPLE RATES: AMPLITUDE RESPONSE BESSEL FILTER

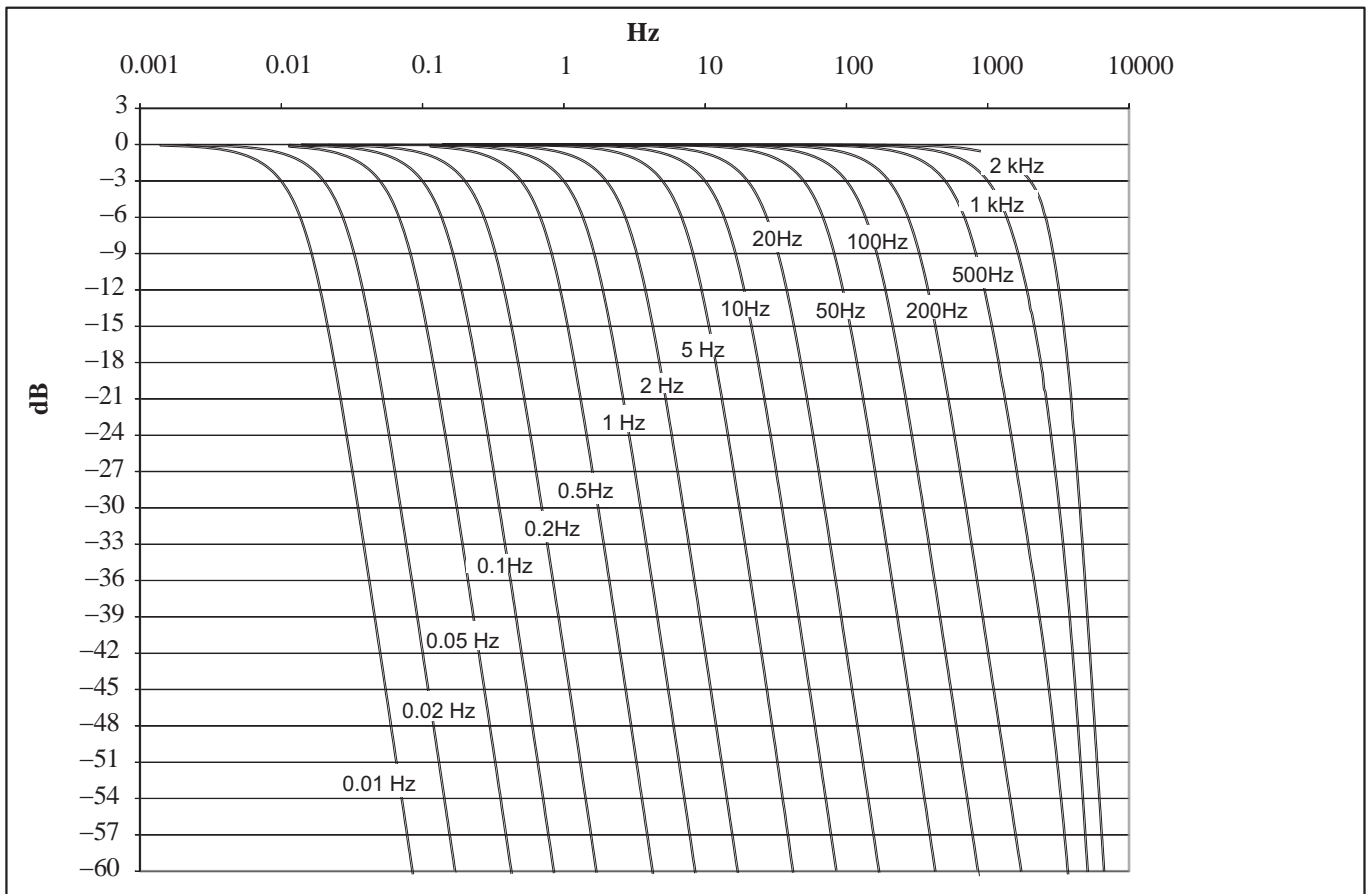


DECIMAL SAMPLE RATES, DIGITAL LOW PASS FILTER TYPE BUTTERWORTH 4TH ORDER

Type	-1dB (Hz)	-3dB (Hz)	-20dB (Hz)	Phase delay ^{*)} (ms)	Rise time (ms)	Overshoot (%)	Rate (S/s)
Butterworth	2,612	3,000	4,316	0.162	0.161	16.1	20,000
	1,703	2,000	3,600	0.234	0.211	12.7	20,000
	838	1,000	1,746	0.465	0.394	11.2	20,000
	430	500	890	0.914	0.778	11.0	20,000
	169	200	355	2.27	1.94	11.0	20,000
	84	100	178	4.51	3.88	11.0	20,000
	42.2	50.0	88.8	9.00	7.75	11.0	20,000
	16.9	20.0	35.5	22.5	19.4	11.0	20,000
	8.4	10.0	17.8	45	38.8	11.0	20,000
	4.22	5.00	8.88	90	77.5	11.0	20,000
	1.68	2.00	3.55	225	194	11.0	20,000
	0.84	1.00	1.78	449	387	11.0	20,000
	0.423	0.500	0.888	898	774	11.0	10,000
	0.169	0.200	0.356	2,250	1,940	11.0	10,000
	0.084	0.100	0.178	4,490	3,870	11.0	5,000
	0.0422	0.0500	0.0888	8,980	7,740	11.0	1,000
0.0168	0.0200	0.0356	22,500	19,400	11.0	1,000	
0.0085	0.0100	0.0178	44,900	38,700	11.0	500	

*) The analog-to-digital converter's delay time is 128 μs for all data rates and has not been accounted for in the "Phase delay" column! The anti-aliasing filter's delay time (160 μs) is not accounted for as well. Hence, 288 μs need to be added to the "Phase delay".

DECIMAL SAMPLE RATES: AMPLITUDE RESPONSE BUTTERWORTH FILTER

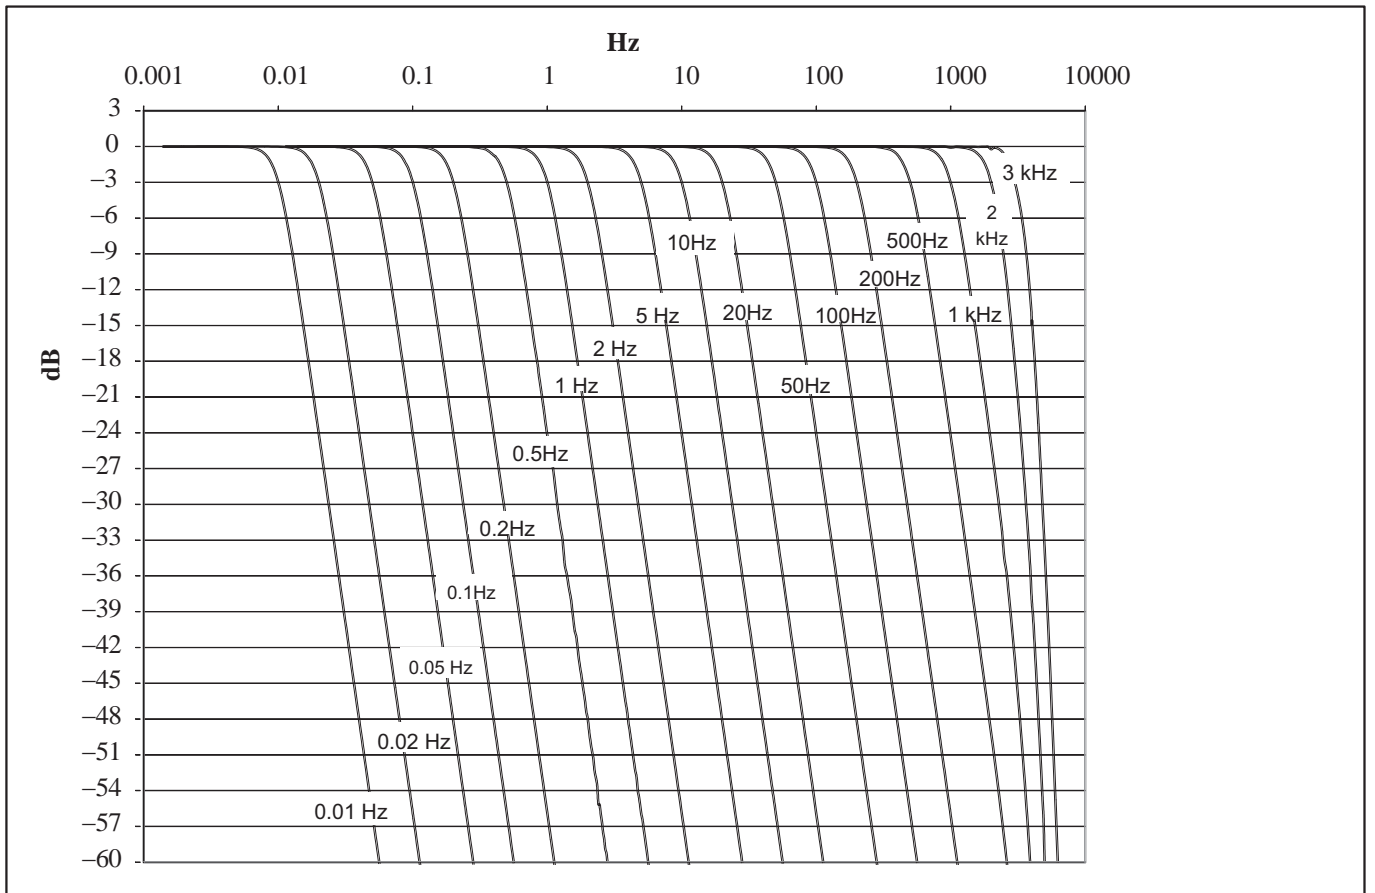


CLASSIC HBM SAMPLE RATES, DIGITAL LOW PASS FILTER TYPE BESSEL 4TH ORDER

Type	-1dB (Hz)	-3dB (Hz)	-20dB (Hz)	Phase delay (ms) ^{*)}	Rise time (ms)	Overshoot (%)	Rate (S/s)
Bessel	1,000	1,575	3,611	0.11	0.2	1.4	19,200
	500	812	2,079	0.3	0.38	1.3	9,600
	200	335	860	0.9	1.05	0.8	9,600
	100	168	427	1.8	2.11	0.8	9,600
	50	84	213	3.9	4.18	0.8	9,600
	20	33.7	85	9.5	10.4	0.8	9,600
	10	16.6	43	19.5	21.0	0.8	9,600
	5	8.4	21	39	41.4	0.8	2,400
	2	3.4	8.6	97	102	0.8	2,400
	1	1.6	4.2	197	215	0.8	2,400
	0.5	0.84	2.1	390	418	0.8	300
	0.2	0.34	0.85	980	1,033	0.8	300
	0.1	0.17	0.43	1,950	2,090	0.8	300
	0.05	0.085	0.21	3,860	4,170	0.8	20
	0.02	0.036	0.088	9,800	10,560	0.8	20
0.01	0.017	0.044	19,500	21,200	0.8	20	

*) The analog-to-digital converter's delay time is 128 μs for all data rates and has not been accounted for in the "Phase delay" column! The anti-aliasing filter's delay time (160 μs) is not accounted for as well. Hence, 288 μs need to be added to the "Phase delay".

CLASSIC HBM SAMPLE RATES : AMPLITUDE RESPONSE BESSEL FILTER

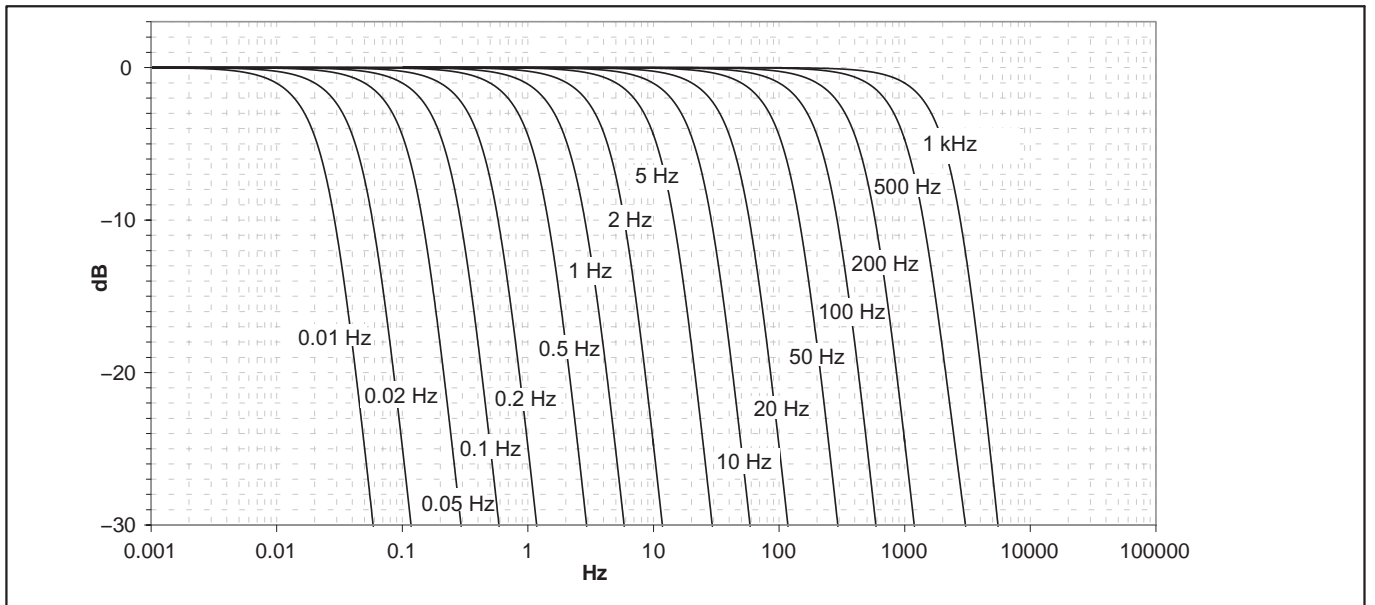


CLASSIC HBM SAMPLE RATES, DIGITAL LOW PASS FILTER TYPE BUTTERWORTH 4TH ORDER

Type	-1dB (Hz)	-3dB (Hz)	-20dB (Hz)	Phase delay (ms) ^{*)}	Rise time (ms)	Overshoot (%)	Rate (S/s)
Butterworth	2,000	3,053	5,083	0	0.144	8.5	19,200
	1,000	1,170	2,077	0.27	0.344	11.0	19,200
	500	587	1,048	0.64	0.652	11.0	9,600
	200	237	420	1.76	1.64	11.0	9,600
	100	118	210	3.65	3.28	11.0	9,600
	50	59	105	7.49	6.29	11.0	9,600
	20	24	42	18.8	16.15	11.0	9,600
	10	12	21	37.7	32.29	11.0	9,600
	5	5.95	10.5	74.9	65.92	11.0	2,400
	2	2.37	4.24	188	163.6	11.0	2,400
	1	1.26	2.12	370	315	11.0	2,400
	0.5	0.59	1.05	756	656	11.0	300
	0.2	0.241	0.419	1,900	1,640	11.0	300
	0.1	0.122	0.210	3,770	3,280	11.0	300
	0.05	0.060	0.106	7,490	6,596	11.0	20
	0.02	0.0245	0.042	18,900	16,200	11.0	20
0.01	0.012	0.021	37,700	32,383	11.0	20	

*) The analog-to-digital converter's delay time is 128 μ s for all data rates and has not been accounted for in the "Phase delay" column! The anti-aliasing filter's delay time (160 μ s) is not accounted for as well. Hence, 288 μ s need to be added to the "Phase delay".

CLASSIC HBM SAMPLE RATES: AMPLITUDE RESPONSE BUTTERWORTH FILTER

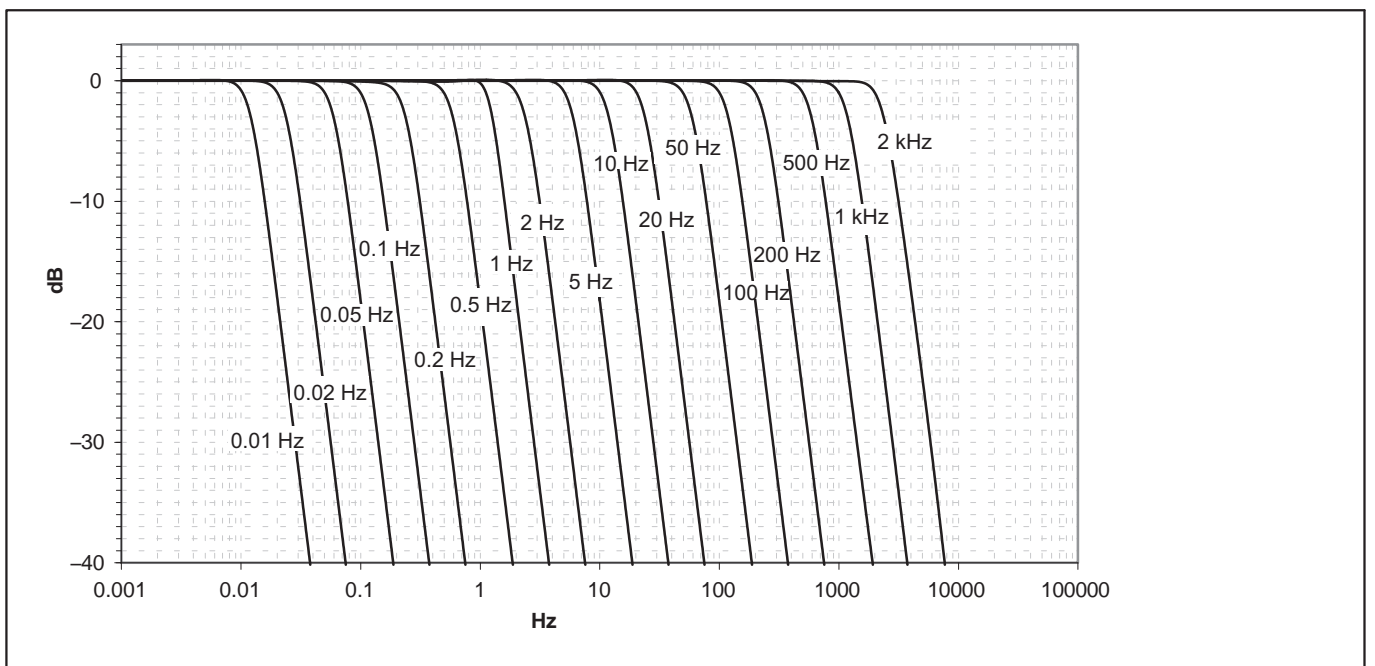




SPECIFICATIONS POWER PACK NTX001

NTX001		
Nominal input voltage (AC)	V	100 ... 240 ($\pm 10\%$)
Stand-by power consumption at 230 V	W	0.5
Nominal load		
U_A	V	24
I_A	A	1.25
Static output characteristics		
U_A	V	24 \pm 4%
I_A	A	0 - 1.25
U_{Br} (Output voltage ripple; peak to peak)	mV	\leq 120
Current limiting, typically from	A	1.6
Primary - secondary separation		galvanically, by optocoupler and converter
Creep distance and clearance	mm	\geq 8
High-voltage test	kV	\geq 4
Ambient temperature range	$^{\circ}\text{C}$ [$^{\circ}\text{F}$]	0... +40 [+32 ... +104]
Storage temperature	$^{\circ}\text{C}$ [$^{\circ}\text{F}$]	-40 ... +70 [-40 ... +158]

ACCESSORIES, TO BE ORDERED SEPARATELY

Article	Description	Ordering number
Power supply		
AC-DC power supply / 24 V	Input: 100 ... 240 V AC ($\pm 10\%$), 1.5 m cable Output: 24 V DC, max. 1.25 A, 2 m cable with ODU plug	1-NTX001
3 m cable - QuantumX supply	3 m cable to supply power to QuantumX modules; suitable plug (ODU Medi-Snap S11M08-P04MJGO-5280) at one end and exposed wires at the other.	1-KAB271-3
Communication		
Ethernet cable	Ethernet cable for direct operation between a PC or Notebook and a module / device, length 2 m, type CAT6A	1-KAB239-2
IEEE1394b FireWire cable (module-to-module)	FireWire connection cable for QuantumX or SomatXR-modules; with matching plugs on both sides. Length 0.2 m (angled) / 0.2 m / 2 m / 5 m Note: The cable enables modules to be supplied with power (max. 1.5 A, from the source to the last drain).	1-KAB272-W-0.2 1-KAB272-0.2 1-KAB272-2 1-KAB272-5
Mechanical		
Connecting elements for QuantumX modules	Connecting elements (clips) for QuantumX modules; Set comprising 2 case clips including mounting material for fast connection of 2 modules.	1-CASECLIP
Connecting elements for QuantumX modules	Fitting panel for mounting of QuantumX modules using case clips (1-CASECLIP), lashing strap or cable tie. Basic fastening by 4 screws.	1-CASEFIT
QuantumX Backplane (big)	QuantumX Backplane for a maximum of 9 modules - Mounting on wall or control cabinet (19") - Connection of external modules by FireWire possible - Power supply: 18 ... 30 V DC / max. 5 A (150 W)	1-BPX001
QuantumX Backplane (Rack)	QuantumX Backplane for maximum 9 modules - 19" rack mounting with handles left and right - Connection of external modules via FireWire possible - Power supply: 18 ... 30 V DC / max. 5 A (150 W)	1-BPX002

Article	Description	Ordering number
QuantumX Backplane (small)	QuantumX Backplane for a maximum of 5 modules - Connection of external modules by FireWire possible - Power supply: 11 ... 30 V DC / max. 5 A (90 W)	1-BPX003
Transducer side		
Push-in connectors (8 pins), gold	16 push-in connectors, Phönix Contact, 8 pins, gold	1-CON-S1015
Mounting aid for Push-in connector	Mounting aid for MX1601/15/16 Push-in connector suitable for 1-CON-S1015	1-WIRING-MATE
TEDS-Package 1 kb (5 pieces)	Package of TEDS chips. Package of 5 1-wire-EEPROM DS28E07 (IEEE 1451.4 TEDS)	1-TEDS-PAK-B
TEDS-Package 4 kb (5 pieces)	Package of TEDS chips. Package of 5 1-wire-EEPROM DS24B33 (IEEE 1451.4 TEDS)	1-TEDS-PAK
Software and product packages		
catman [®] AP 	Complete package including catman [®] Easy functionality plus additional modules such as integration of video cameras (EasyVideoCam), complete post-process analysis (EasyMath), automation of recurring processes (EasyScript), offline preparation of measurement projects (EasyPlan) as well as additional functions such as calculating electrical power, special filters, frequency spectrum, etc. More details at www.hbm.com/catman/	1-CATMAN-AP
catman [®] EASY 	The basic software package for measurement data acquisition comprises convenient channel parameterization using TEDS or the sensor database, measurement job parameterization, individual visualization, data storage and reporting.	1-CATMAN-EASY
catman [®] PostProcess 	Post Process edition for visualization, preparation and analysis of measurement data, including many mathematical functions, data export and reporting.	1-CATEASY-PROCESS
LabVIEW [™] -driver ¹⁾	Universal driver from HBM for LabVIEW [™] .	1-LABVIEW-DRIVER
CANape [®] driver	QuantumX driver for CANape [®] software from Vector Informatik. CANape versions from 10.0 are supported.	1-CANAPE-DRIVER

1) More drivers and partners at www.hbm.com/quantumX/