

# QUANTUM<sup>X</sup> MX410


Highly dynamic  
universal amplifier

## Special features



- 4 individually configurable inputs (electrically isolated)
- Connection of more than 5 transducer technologies
- Data rate: up to 96,000 Hz  
19,200 with 2 channels
- 24-bit A/D converter per channel for synchronous, parallel measurements
- Active low-pass filter
- 4 analog outputs
- Real-time computation (Peak, RMS)
- Supply voltage (DC) for active transducers: 5 V ... 24 V

## Block diagram

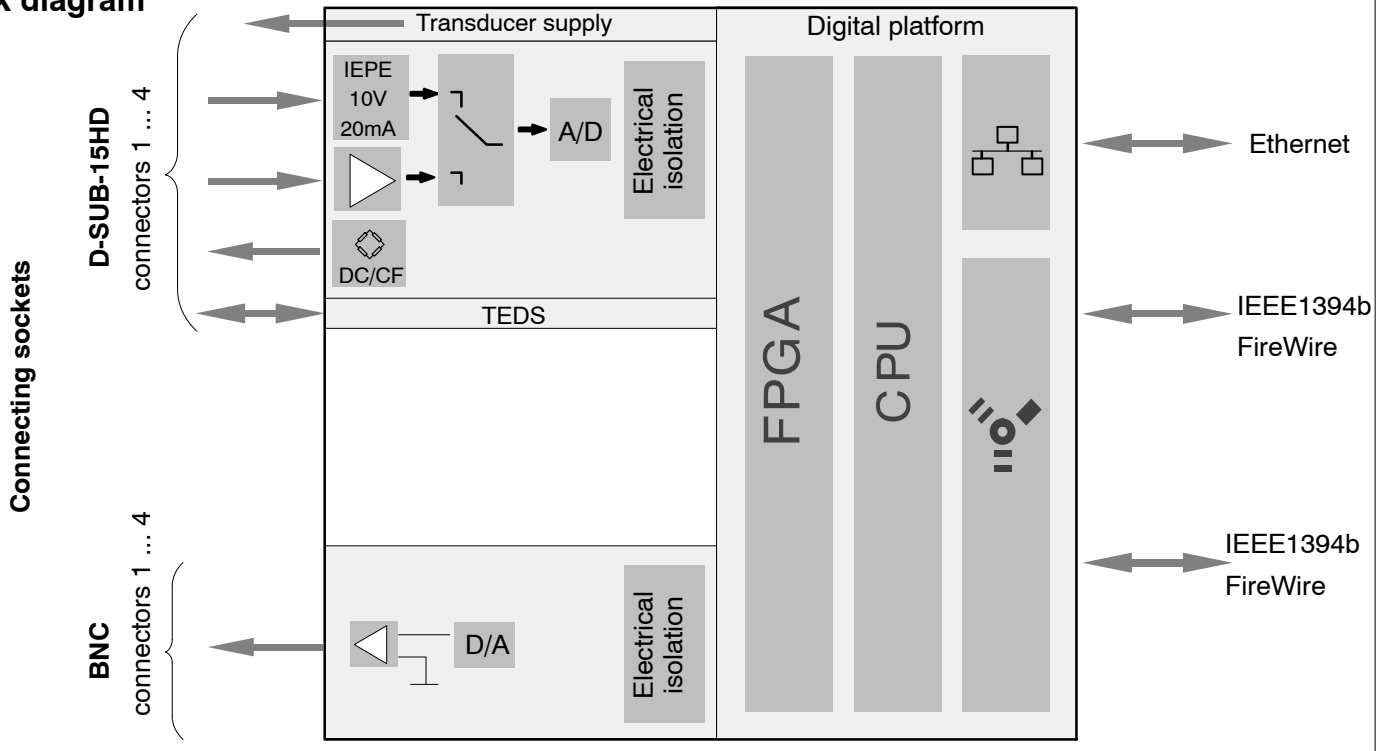

# Specifications

General specifications		
<b>Inputs</b>	number	4, electrically isolated from each other and from supply <sup>1)</sup>
<b>Transducer technologies per connector</b>		Strain gage, half and full bridge (carrier frequency or DC), piezoelectric transducers (resistiv, current-fed) / IEPE, Inductive half and full bridge, voltage, (10 V) current (20 mA)
<b>A/D conversion</b>		24-bit delta-sigma converter
<b>Data rate</b>	Hz	0.1 ... 96,000 per channel, adjustable individually or 0.1 ... 192000 with 2 channels adjustable individually
<b>Bandwidth</b>	kHz	38 with 96,000 Hz data rate 78 with 192,000 Hz data rate
<b>Active low pass filter</b> (Bessel/Butterworth, adjustable)	Hz	0.1 ... 20,000
<b>Transducer identification (TEDS, IEEE 1451.4)</b> max. TEDS module distance	m	100
<b>Transducer connection</b>		D-SUB-15HD
<b>Analog outputs</b>		4 (BNC), electrically isolated to measurement inputs and to supply (not to one another)
<b>Supply voltage range (DC)</b>	V	10 ... 30 (nominal (rated) voltage 24 V)
<b>Supply voltage interruption</b>		max. for 5 ms at 24 V
<b>Power consumption</b> without adjustable transducer excitation with adjustable transducer excitation	W	< 12 < 15
<b>Supply voltage</b> (active transducers) Adjustable transducer excitation (DC) Maximum output power	V W	5 ... 24; adjustable channel by channel 0.7 per channel / 2 in total
<b>Ethernet</b> (data link) Protocol/addressing Plug connection Max. cable length to module	- - m	10Base-T / 100Base-TX TCP/IP (direct IP address or DHCP) 8P8C-modular plug (RJ-45) with twisted pair cable (CAT-5) 100
<b>IEEE1394b FireWire</b> (module synchronization, data link, optional supply voltage) Baud rate Max. current from module to module Max. cable length between nodes Max. number of modules connected in series (daisy chain) Max. number of modules in a IEEE1394b FireWire system (incl. hubs <sup>2)</sup> , backplane) Max. number of hops <sup>3)</sup>	MBaud A m - - -	IEEE 1394b (HBM modules only) 400 (approx. 50 MBytes/s) 1.5 5 12 (= 11 hops) 24 14
<b>Synchronization options</b> EtherCAT <sup>4)</sup> NTP IRIG-B (B000 to B007; B120 to B127)		IEEE1394bFireWire (automatically, recommended) via CX27 via Ethernet via MX440A- or MX840A input channel
<b>Nominal (rated) temperature range</b>	°C [°F]	-20... +60 [-4 ... +140]
<b>Operating temperature range</b>	°C [°F]	-20 ... +65 [-4 ... +149]
<b>Storage temperature range</b>	°C [°F]	-40 ... +75 [-40 ... +167]
<b>Relative humidity</b>	%	5 ... 95 (non-condensing)
<b>Protection class</b>	-	III
<b>Degree of protection</b>		IP20 per EN60529
<b>Mechanical tests<sup>5)</sup></b> Vibration (30 min) Shock (6 ms)	m/s <sup>2</sup> m/s <sup>2</sup>	50 350
<b>EMC requirements</b>		per EN 61326
<b>Maximum input voltage at transducer socket to ground (PIN 6 or PIN 9)</b> PIN 1, 2, 3, 4, 5, 7, 8, 10 (bridge and TEDS) PIN 14 (voltage) PIN 13 (current) PIN 4, 15 (control circuits)	V V V V	± 5.5 ± 40 ± 1.5 + 3.3
<b>Dimensions, horizontal (H x W x D)</b>	mm mm	52.5 x 200 x 122 (with case protection) 44 x 174 x 119 (without case protection)
<b>Weight, approx.</b>	g	990

<sup>1)</sup> When variable transducer supply is used, there is no electrical isolation from the supply.

<sup>2)</sup> Hub: IEEE1394b FireWire node point or distributor

<sup>3)</sup> Hop: transition from module to module/signal conditioning

<sup>4)</sup> EtherCAT<sup>®</sup> is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany

<sup>5)</sup> Mechanical stress is tested in accordance with European standards EN60068-2-6 for vibration and EN60068-2-27 for shock. The devices are exposed to an acceleration of 50 m/s<sup>2</sup> within the frequency range 5...65 Hz in all 3 axes. Duration of this vibration test: 30 minutes per axis. The shock test is implemented at a nominal (rated) acceleration of 350 m/s<sup>2</sup> for a duration of 6 ms, half sine and with shocks in each of the six possible directions.

## Specifications (continued)

Strain gage full bridge and half bridge 4 mV/V CF with excitation 1 V or 2.5 V or 5 V (AC, effective)		
Accuracy class		0.05
Carrier frequency (sine)	Hz	4,800 + 2
Bridge excitation voltage (effective)	V	1 ; 2.5; 5 (±5 %)
Transducers that can be connected		Strain gage and inductive full and half bridges
Permissible cable length between MX410 and transducer	m	100
Measuring ranges at 5 V excitation at 2.5 V excitation at 1 V excitation	mV/V mV/V mV/V	±4 ±8 ±20
Measurement frequency range (-3 dB)	Hz	0 ... 1,600
Transducer impedance at 5 V excitation at 2.5 V excitation at 1 V excitation	Ω Ω Ω	300 ... 1,000 110 ... 1,000 80 ... 1,000
Noise at 25 °C and 5 V excitation (peak to peak) at 1 Hz Bessel filter at 10 Hz Bessel filter at 100 Hz Bessel filter at 1 kHz Bessel filter	μV/V μV/V μV/V μV/V	< 0.1 < 0.2 < 0.5 < 1.5
Linearity error	%	< 0.02 of full scale value
Zero drift (full bridge with excitation 5 V)	% / 10 K	< 0.02 of full scale value
Full-scale drift (excitation 5 V)	% / 10 K	< 0.05 of measured value

Strain gage full bridge and half bridge 4 mV/V DC with excitation 1 V or 2.5 V or 5 V or 7.5 V (DC)		
Accuracy class		0.05
Bridge excitation voltage (DC)	V	1 ; 2.5; 5; 7.5 (±8 %)
Transducers that can be connected		Strain gage full and half bridges
Permissible cable length between MX410 and transducer	m	100 (at U <sub>B</sub> =7.5 V: 50 m)
Measuring ranges at 7.5 V excitation at 5 V excitation at 2.5 V excitation at 1 V excitation	mV/V mV/V mV/V mV/V	±4 ±4 ±10 ±20
Measurement frequency range (-3 dB)	Hz	0 ... 39,300 with 96,000 Hz data rate 0 ... 78,600 with 192,000 Hz data rate
Transducer impedance at 7.5 V excitation at 5 V excitation at 2.5 V excitation at 1 V excitation	Ω Ω Ω Ω	300 ... 5,000 (max. 50 m cable) 110 ... 5,000 110 ... 5,000 80 ... 5,000
Noise at 25 °C and 5 V excitation (peak to peak) at 1 Hz Bessel filter at 10 Hz Bessel filter at 100 Hz Bessel filter at 1 kHz Bessel filter at 10 kHz Bessel filter at filter Off	μV/V μV/V μV/V μV/V μV/V μV/V	< 0.15 < 0.3 < 0.6 < 2 < 9 < 10
Linearity error	%	< 0.02 of full scale value
Zero drift (full bridge with excitation 5 V)	% / 10 K	< 0.05 of full scale value
Full-scale drift (excitation 5 V)	% / 10 K	< 0.05 of measured value

## Specifications (continued)

Strain gage full bridge and half bridge 100 mV/V CF with excitation 1 V or 2.5 V (AC, effective)		
Accuracy class		0.05
Carrier frequency (sine)	Hz	4,800 + 2
Bridge excitation voltage (effective)	V	1 ; 2.5; ( $\pm 8\%$ )
Transducers that can be connected		Strain gage and inductive full and half bridges
Permissible cable length between MX410 and transducer	m	100
Measuring ranges at 2.5 V excitation at 1 V excitation	mV/V mV/V	$\pm 100$ $\pm 250$
Measurement frequency range (-3 dB)	Hz	0 ... 1,600
Transducer impedance at 2.5 V excitation at 1 V excitation	$\Omega$ $\Omega$	110 ... 1,000 80 ... 1,000
Noise at 25 °C and 2.5 V excitation (peak to peak) at 1 Hz Bessel filter at 10 Hz Bessel filter at 100 Hz Bessel filter at 1 kHz Bessel filter	$\mu\text{V/V}$ $\mu\text{V/V}$ $\mu\text{V/V}$ $\mu\text{V/V}$	< 2 < 4 < 12 < 40
Linearity error	%	< 0.02 of full scale value
Zero drift (full bridge with excitation 2.5 V)	% / 10 K	< 0.01 of full scale value
Full-scale drift (excitation 2.5 V)	% / 10 K	< 0.05 of measured value

Piezoresistive strain gage full bridge and half bridge 100 mV/V DC with excitation 2.5 V or 5 V (DC)		
Accuracy class		0.05
Bridge excitation voltage (DC)	V	2.5; 5 ( $\pm 5\%$ )
Transducers that can be connected		Strain gage full and half bridges
Permissible cable length between MX410 and transducer	m	100
Measuring ranges at 5 V excitation at 2.5 V excitation	mV/V mV/V	$\pm 50$ $\pm 100$
Measurement frequency range (-3 dB)	Hz	0 ... 39,300 with 96,000 Hz data rate 0 ... 78,600 with 192,000 Hz data rate
Transducer impedance at 5 V excitation at 2.5 V excitation	$\Omega$ $\Omega$	110 ... 5,000 110 ... 5,000
Noise at 25 °C and 5 V excitation (peak to peak) at 1 Hz Bessel filter at 10 Hz Bessel filter at 100 Hz Bessel filter at 1 kHz Bessel filter at 10 kHz Bessel filter at filter Off	$\mu\text{V/V}$ $\mu\text{V/V}$ $\mu\text{V/V}$ $\mu\text{V/V}$ $\mu\text{V/V}$ $\mu\text{V/V}$	< 2 < 3 < 8 < 25 < 130 < 150
Linearity error	%	< 0.02 of full scale value
Zero drift (full bridge with excitation 5 V)	% / 10 K	< 0.03 of full scale value
Full-scale drift (excitation 5 V)	% / 10 K	< 0.05 of measured value

## Specifications (continued)

Voltage 10 V (DC)		
Accuracy class		0.03
Transducers that can be connected		Voltage sensor $\pm 10$ V
Permissible cable length between MX410 and transducer	m	100
Measuring range	V	$\pm 10$
Measurement frequency range (-3 dB)	Hz	0 ... 39,300 with 96,000 Hz data rate 0 ... 78,600 with 192,000 Hz data rate
Internal resistance of the connected voltage source	k $\Omega$	< 5
Input impedance	M $\Omega$	> 10
Noise at 25 °C (peak to peak)		
at 1 Hz Bessel filter	$\mu$ V	< 150
at 10 Hz Bessel filter	$\mu$ V	< 300
at 100 Hz Bessel filter	$\mu$ V	< 600
at 1 kHz Bessel filter	$\mu$ V	< 3,000
at 10 kHz Bessel filter	$\mu$ V	< 13,000
at filter Off / 96000 values/s	$\mu$ V	< 15,000
Linearity error	%	< 0.02 of full scale value
Common-mode rejection		
at DC common-mode	dB	> 100
at 50 Hz common-mode	dB	75
Max. common-mode voltage (to housing and supply ground)	V	$\pm 60$
Zero drift	% / 10 K	< 0.02 of full scale value
Full-scale drift	% / 10 K	< 0.03 of measured value

Current 20 mA (DC)		
Accuracy class		0.03
Transducers that can be connected		Transducer with 4 ... 20 mA current output
Permissible cable length between MX410 and transducer	m	100
Measuring range	mA	$\pm 20$
Measurement frequency range (-3 dB)	Hz	0 ... 39,300 with 96,000 Hz data rate 0 ... 78,600 with 192,000 Hz data rate
Measuring resistance value	$\Omega$	50
Noise at 25 °C (peak to peak)		
at 1 Hz Bessel filter	$\mu$ A	< 0.5
at 10 Hz Bessel filter	$\mu$ A	< 1.5
at 100 Hz Bessel filter	$\mu$ A	< 10
at 1 kHz Bessel filter	$\mu$ A	< 20
at 10 kHz Bessel filter	$\mu$ A	< 28
at filter Off	$\mu$ A	< 30
Linearity error	%	< 0.02 of full scale value
Common-mode rejection		
at DC common-mode	dB	> 100
at 50 Hz common-mode	dB	typically
Max. common-mode voltage (to housing and supply ground)	V	$\pm 60$
Zero drift	% / 10 K	< 0.02 of full scale value
Full-scale drift	% / 10 K	< 0.03 of measured value

## Specifications (continued)

Current-fed piezoelectric transducers (IEPE, Integrated electronics Piezo electric)		
Accuracy class		0.1
Transducer technology		Current-fed piezoelectric transducer via adapter D-SUB-15HD to BNC
Permissible cable length between MX410 and transducer	m	< 30
Transducer identification (TEDS, IEEE 1451.4)		only version 1.0
Transducer excitation	mA	5.5mA ± 15%
Measuring ranges	V	±2; ±10
Measurement frequency range (-3 dB)	Hz	0 ... 39,300 with 96,000 Hz data rate 0 ... 78,600 with 192,000 Hz data rate
Noise at 25 °C and measuring range ± 10 V (peak to peak)		
at 1 Hz Bessel filter	µV	< 100
at 10 Hz Bessel filter	µV	< 300
at 100 Hz Bessel filter	µV	< 600
at 1 kHz Bessel filter	µV	< 3,000
at 10 kHz Bessel filter	µV	< 13,000
at filter Off	µV	< 15,000
Linearity error	%	< 0.1 of full scale value
Common-mode rejection		
at DC common-mode	dB	> 100
at 50 Hz common-mode, typically	dB	75
Max. common-mode voltage (to housing and supply ground)	V	± 60
Zero drift	% / 10 K	< 0.1 of full scale value

Analog outputs		
Accuracy class		0.05
Number of outputs		4 (input1 to output1 etc.)
Type of connection		BNC
Max. cable length	m	< 30
Bandwidth	kHz	Defined by the input signal filter
Output rate max.	kHz	576
Nominal (rated) voltage	V	± 10
Reference signal		Common ground for all outputs, electrically isolated from supply and measurement inputs
D/A converter resolution	bits	16
Noise (peak to peak)	mV	< 10
Permissible load impedance	Ω	> 2,000 / <2 nF
Crosstalk attenuation	dB	> 65
Min. settling time	µs	120
Zero drift	% / 10 K	< 0.02 of full scale value
Full-scale drift	% / 10 K	< 0.05 of output value

Real-time computation on the module		
Root-mean-square unit (RMS)		4
Peak-value unit		
Number of peak values		8
Max. output rate	Hz	4800

## Active low-pass filter data

(4<sup>th</sup> order Bessel/Butterworth with data rate < 96,000 Hz; 6<sup>th</sup> order with data rate=96,000 Hz)

Type	-1dB (Hz)	-3dB (Hz)	-20dB (Hz)	Phase delay <sup>*)</sup> (ms)	Rise time (ms)	Overshoot (%)	Data rate (Hz)
<b>Bessel</b>	20000	29250	43000	0.002	0.016	4.1	96000
	10000	16810	40260	0.008	0.023	1.5	96000
	5000	8510	19906	0.027	0.042	0.9	96000
	2000	3515	8275	0.094	0.1	0.6	96000
	1000	1715	4070	0.22	0.2	0.6	96000
	500	852	2008	0.47	0.41	0.6	96000
	200	341	803	1.22	1.01	0.8	96000
	100	171	402	2.5	2.01	0.8	96000
	50	84.2	215	4	4.08	1	19200
	20	33.7	86	10	10.2	1	9600
	10	16.9	43	20	20.6	1	9600
	5	8.41	21.5	40	41	1	4800
	2	3.37	8.6	98	102.8	1	1200
	1	1.68	4.3	196	206.4	1	600
	0.5	0.84	2.15	392	411.2	1	600
	0.2	0.34	0.86	982	1026	1	300
0.1	0.17	0.43	1968	2052	1	150	
<b>Butterworth</b>	20000	21700	27500	0.025	0.02	15.6	96000
	10000	11100	15500	0.06	0.04	15.6	96000
	5000	5585	8100	0.13	0.08	14.5	96000
	2000	2238	3280	0.3	0.2	14.5	96000
	1000	1119	1640	0.6	0.4	14.5	96000
	500	560	820	1.2	0.8	14.5	96000
	200	237	420	2.1	1.6	11	19200
	100	118	210	4	3.3	11	19200
	50	59	105	7.8	6.6	11	19200
	20	24	42	19.4	16.1	11	4800
	10	11.8	21	38.6	32.4	11	2400
	5	5.9	10.5	76.6	65	11	1200
	2	2.4	4.2	191	163	11	600
	1	1.2	2.1	382	325	11	300
	0.5	0.59	1.05	760	653	11	300
	0.2	0.24	0.42	1900	1630	11	150
0.1	0.12	0.21	3790	3260	11	150	

<sup>\*)</sup> The delay of the A/D converter is 293  $\mu$ s for all data rates, it has not been accounted for in the "Phase delay" column!

## Active low-pass filter data (High-speed mode)

(4<sup>th</sup> order Bessel/Butterworth with data rate < 192,000 Hz; 6<sup>th</sup> order with data rate = 192,000 Hz)

Type	-1dB (Hz)	-3dB (Hz)	-20dB (Hz)	Phase delay*) (ms)	Rise time (ms)	Overshoot (%)	Data rate (Hz)
<b>Bessel</b>	40000	58500	86000	0.001	0.008	1.6	192000
	20000	33620	80520	0.004	0.012	1.5	192000
	10000	17020	39812	0.0135	0.021	0.9	192000
	4000	7030	16550	0.047	0.05	0.6	192000
	2000	3430	8140	0.11	0.1	0.6	192000
	1000	1704	4016	0.235	0.21	0.6	192000
	400	682	1606	0.61	0.51	0.8	192000
	200	342	804	1.25	1.00	0.8	192000
	100	168.4	430	2	2.04	1	192 00
	40	67.4	172	5	5.1	1	19200
	20	33.8	86	10	10.3	1	19200
	10	16.82	43	20	20.5	1	9600
	4	6.74	17.2	49	51.4	1	2400
	2	3.36	8.6	98	103.2	1	1200
	1.0	1.68	4.3	196	205.6	1	1200
	0.4	0.68	1.72	491	513	1	600
0.2	0.34	0.86	984	1026	1	300	
<b>Butterworth</b>	40000	43400	55000	0.013	0.01	17.8	192000
	20000	22200	31000	0.03	0.02	15.6	192000
	10000	11170	16200	0.07	0.04	14.5	192000
	4000	4476	6560	0.15	0.1	14.5	192000
	2000	2238	3280	0.3	0.2	14.5	192000
	1000	1120	1640	0.6	0.4	14.5	192000
	400	474	840	1.05	0.8	14.5	19200
	200	236	420	2	1.65	11	19200
	100	118	210	3.9	3.3	11	19200
	40	48	84	9.7	8.05	11	9600
	20	23.6	42	19.3	16.2	11	4800
	10	11.8	21	38.3	32.5	11	2400
	4	4.8	8.4	95.5	81.5	11	1200
	2	2.4	4.2	191	162.5	11	600
	1	1.18	2.1	380	326.5	11	600
	0.4	0.48	0.84	950	815	11	300
0.2	0.24	0.42	1895	1630	11	300	

\*) The delay of the A/D converter is 141  $\mu$ s for all data rates, it has not been accounted for in the "Phase delay" column!

## Specifications NTX001 power pack

NTX001		
<b>Nominal (rated) input voltage (AC)</b>	V	100 ... 240 ( $\pm 10\%$ )
<b>No-load power consumption at 230 V</b>	W	0.5
<b>Nominal (rated) loading</b>		
$U_A$	V	24
$I_A$	A	1.25
<b>Static output data</b>		
$U_A$	V	$24 \pm 4\%$
$I_A$	A	0 ... 1.25
$U_{Br}$ (output ripple voltage; peak to peak)	mV	$\leq 120$
<b>Current limiting</b> , typically from	A	1.6
<b>Isolation</b> primary – secondary		electrical, by optical coupler and converter
<b>Creepage and clearance distances</b>	mm	$\geq 8$
<b>High-voltage test</b>	kV	$\geq 4$
<b>Ambient temperature</b>	$^{\circ}\text{C}$	0 ... +40
<b>Storage temperature</b>	$^{\circ}\text{C}$	-40 ... +70

## Accessories, to be ordered separately

<b>MX410 accessories</b>		
<b>Article</b>	<b>Description</b>	<b>Order no.</b>
<b>Voltage supply</b>		
AC/DC power pack / 24 V	Input: 100 ... 240 V AC ( $\pm 10\%$ ), 1.5 m cable Output: 24 V DC, max. 1.25 A, 2 m cable with ODU plug	1-NTX001
3 m cable – QuantumX supply	3 m cable for voltage supply of QuantumX modules; suitable plug (ODU Medi-Snap S11M08-P04MJGO-5280) at one end and exposed wires at the other.	1-KAB271-3
<b>Communication</b>		
IEEE1394b FireWire cable, (module-to-module)	FireWire cable connector between QuantumX modules, fitted with suitable plugs at both ends. Lengths 0.2 m/2 m/5 m. Note: Voltage can also be supplied to the QuantumX modules via the cable (max. 1.5 A, from source to last acceptor).	1-KAB269-0.2 1-KAB269-2 1-KAB269-5
IEEE1394b FireWire IEEE PC-Card	FireWire IEEE 1394b PC-Card (PCMCIA adapter) to connect QuantumX modules to a notebook or PC	1-IF001
IEEE1394b FireWire IEEE ExpressCard	FireWire IEEE 1394b ExpressCard (ExpressCard/34) to connect QuantumX modules to a notebook or PC	1-IF002
IEEE1394b FireWire cable, PC-to-module, 3 m	FireWire cable connector from PC to first module. For data transmission from QuantumX modules to PC. Fitted with suitable plugs at both ends. Length: 3 m.	1-KAB270-3
IEEE1394b FireWire-cable, hub-to-module, 3 m	FireWire connection cable between HUB and module.	1-KAB275-3
FireWire Extender SCM-FW	Package including 2 in-line elements for extension of the FireWire connection up to 40 m; required parts: 2 x 1-KAB269-x and Industrial Ethernet cable (M12, CAT5e/6, max. 30 m). KAB270-3 connection is not possible!	1-SCM-FW
Ethernet cross over cable	Ethernet cross-over cable for direct operation of devices on a PC or notebook, length 2 m, type CAT5+	1-KAB239-2
<b>Mechanical data</b>		
Connecting elements for QuantumX modules	Connecting elements (clips) for QuantumX modules; set comprising 2 case clips including assembly material for fast connection of 2 modules.	1-CASECLIP
Connecting elements for QuantumX modules	Fitting panel for mounting of QuantumX modules using case clips (1-CASECLIP), lashing strap or cable tie. Basic fastening by 4 screws.	1-CASEFIT
QuantumX backplane (Standard)	QuantumX backplane – Standard for a maximum of 9 modules, IP 20 version; – Mounting on wall or control cabinet (19") - Connection of external modules by FireWire possible; - Power supply: 24 V DC / max. 5 A (150 W);	1-BPX001

## Accessories, to be ordered separately (continued)

MX410 accessories		
Article	Description	Order no.
<b>Transducer side</b>		
DSub HD 15-pin-to-DSub 15-pin. adapter	DSub HD 15-pin-to-DSub 15-pin adapter for connecting transducers with pre-assembled DSub plugs MX410 (length approx. 0.3 m) Note: ready-made for full-bridge (6-wire).	1-KAB416
DSub HD 15-pin-to-BNC adapter	Adapter for connecting current-fed piezoelectric sensors (IEPE) with BNC connection to MX410; DSub HD 15-pin plug to BNC-socket, (length approx. 5 cm)	1-IEPE-MX410
DSub HD 15-pin plug set with TEDS chip	DSub HD 15-pin (male) plug kit with TEDS chip for storing a sensor data sheet; housing: metallized plastic with knurled screws. Note: the TEDS chip is blank.	1-SUBHD15-MALE
1-Wire-EEPROMS	Package of 10 pieces of 1-wire EEPROMS DS24B33 (IEEE1451.4 TEDS)	1-TEDS-PAK
Port saver, SubHD 15 pol.	4 x D-SUB HD 15 pin male-to-female port savers; increasing the number of plugging/unplugging cycles to min. 500. Adaptor attaches securely with 4-40 UNC screws.	1-SUBHD15-SAVE
350 ohm strain gauge quarter bridge module	Signal conditioning of strain gauge quarter bridge at QuantumX full bridge input. Integrated 350-ohm completion resistor; soldering points for transducer cable (3 wire); TEDS; D-Sub-HD device connection.	1-SCM-SG350
120 ohm strain gauge quarter bridge module	Signal conditioning of strain gauge quarter bridge at QuantumX full bridge input. Integrated 120-ohm completion resistor; soldering points for transducer cable (3 wire); TEDS; D-Sub-HD device connection.	1-SCM-SG120
High-voltage signal conditioner	High-voltage signal conditioner for differential measurement of voltages up to 300 V CAT II with type MX840, MX840A, MX410 and MX440A QuantumX modules, with SubHD connector and fixed, 1-m-long measuring leads with 4-mm laboratory plugs.	1-SCM-HV
<b>Software and product packages</b>		
MX410 + catman® EASY	Package including: - MX410 amplifier (1-MX410) - Power supply (1-NTX001) - 4 transducer plugs with TEDS (1-SUBHD15-MALE) - Ethernet Cross-over cable (1-KAB239-2) - catman® Easy software from HBM (1-CATMAN-EASY) - Including software maintenance for the first 12 months	1-MX410-PAKEASY
MX410 + catman® AP	Package including: - MX410 amplifier (1-MX410) - Power supply (1-NTX001) - 4 transducer plugs with TEDS (1-SUBHD15-MALE) - Ethernet Cross-over cable (1-KAB239-2) - catman® AP software from HBM (1-CATMAN-AP) - Including software maintenance for the first 12 months	1-MX410-PAKAP
DIAdem® driver	QuantumX driver for DIAdem® software from National Instruments. German user interface only.	1-DIADEM-DRIVER
CANape® driver	QuantumX driver for CANape® software from Vector Informatik. CANape versions from 10.0 are supported.	1-CANAPE-DRIVER
QuantumX system CD	QuantumX Assistant, LabVIEW driver, programming interface (.NETAPI), TEDS editor	free

© Hottinger Baldwin Messtechnik GmbH.  
Modifications reserved. All details describe our products in  
general form only. They are not to be understood as express  
warranty and do not constitute any liability whatsoever.

**Hottinger Baldwin Messtechnik GmbH**

Im Tiefen See 45 · 64293 Darmstadt · Germany  
Tel. +49 6151 803-0 · Fax: +49 6151 803-9100  
Email: [info@hbm.com](mailto:info@hbm.com) · [www.hbm.com](http://www.hbm.com)

measure and predict with confidence

