

KD/STZ


Force transducers

Special features


- KD: compressive force transducers
STZ: tensile force transducers
- Nominal forces 600 kN ... 5 MN
- Standard: 4 full bridges for direct bending moment acquisition
- KD/STZ-specification for material testing machines



KD 1...2 MN

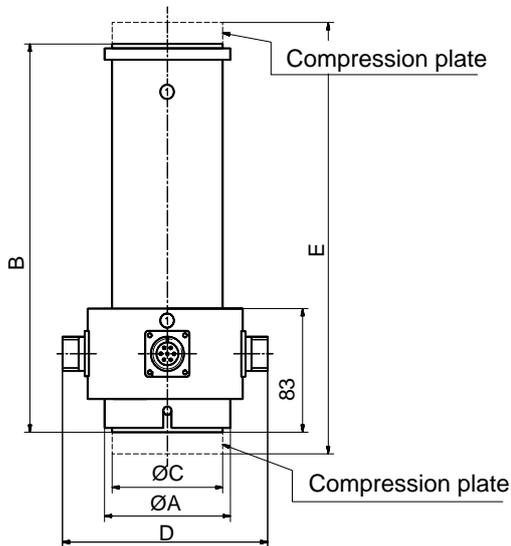

KD 3...5 MN

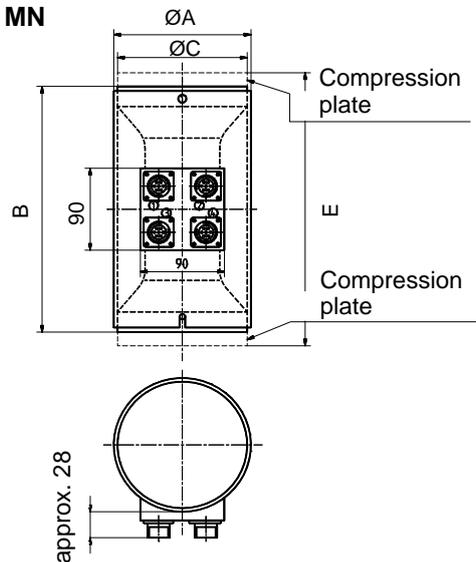

Dimensions (in mm; 1 mm = 0.03937 inches)


Type order no.	ØA	B	ØC	approx. D	E	Weight
1-KD / 1 MN	91	270	80	155	300	10 kg
1-KD / 2 MN	124	270	113	188	300	18 kg
1-KD / 3 MN	147	270	139	-	320	27 kg
1-KD / 5 MN	189	370	179	-	440	64 kg

Specifications KD/STZ

Type			KD compression cylinder				STZ tension bar		
Data according to VDI 2638 standards									
Nominal force	F_{nom}	kN	1 000	2 000	3 000	5 000	600	1 000	
Class under ISO 376 ($0.2F_{nom}$ to F_{nom}) ¹⁾			0.5						
Nominal sensitivity	C_{nom}	mV/V	2.3 to 2.4						
Rel. zero point compensation (zero signal return)	f_0	%	< 0.025 (typ. 0.012)						
Relative range ($0.2F_{nom}$ to F_{nom}) at unchanged mounting position, typ.	b_i	%	0.02						
	b	%	0.07						
Relative range of inversion ($0.2F_{nom}$ to F_{nom})	u	%	0.13 (typ. 0.07)						
Effect of temperature on sensitivity / 10 K by reference to nominal sensitivity	TK_C	%	0.1						
Effect of temperature on the zero signal / 10 K by reference to nominal sensitivity	TK_0	%	0.1						
Number of strain gauge full bridges			4						
Input resistance	R_e	Ω	700 \pm 2 %						
Isolation resistance	R_{is}	Ω	> 5 x 10 ⁹						
Reference excitation voltage	U_{ref}	V	5						
Operating range of excitation voltage	$B_{U, G}$	V	0.5 ... 12						
Nominal temperature range	$B_{t, nom}$	$^{\circ}C$	+10...+40						
Storage temperature range	$B_{t, S}$	$^{\circ}C$	-25...+85						
Reference temperature	t_{ref}	$^{\circ}C$	+22						
Max. operational force	(F_G)	%	115						
Weight, approx.		kg	see drawings						
Degree of protection to DIN EN 60529			IP64						
Electrical connection			4 MS3102A16S-1S device boxes						

¹⁾ Classification can only be obtained in conjunction with a DKD calibration under ISO 376 from HBM

Dimensions

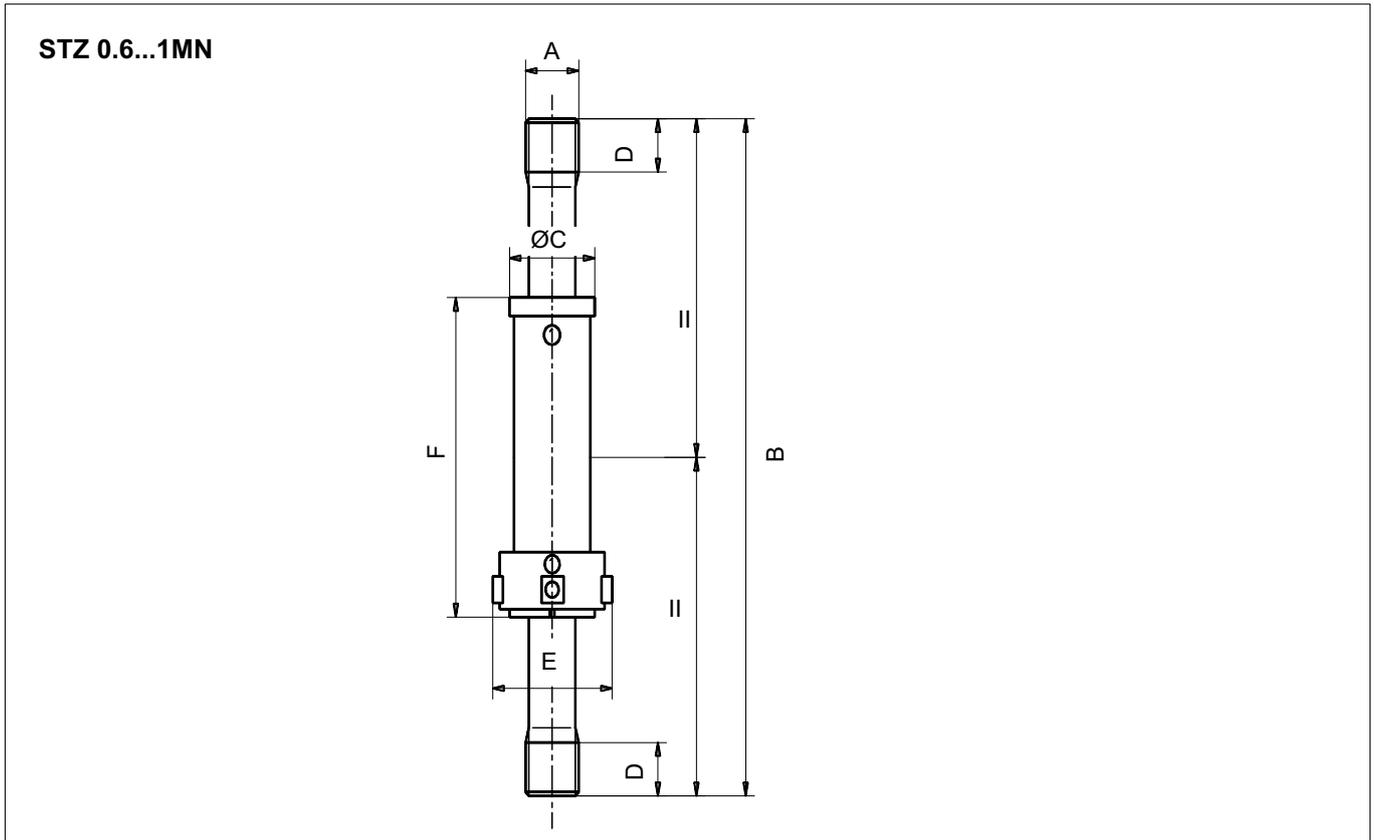

Typ. ord.no.	A	B	ØC	D	approx. E	F
1-STZ / 0.6 MN	M56x4	650	78,3	40	142	232
1-STZ / 1 MN	M64x4	750	96.3	60	160	240


These special KD and STZ transducers are used to check out material testing machines and are designed in accordance to ISO 376. They are compressive force transducers and tensile force transducers that, because of their maximum overall height, are suitable for checking material testing machines according to ISO 7500-1.

The transducers can be used to not only check the force measuring device itself, but also its machine frame under loading. The transducers are therefore each equipped with four SG full bridges, attached around 90° at the circumference of the transducer spring body. In this way, it is possible to determine if the machine frame and the force introduction parts allow the correct, axial stress of a properly installed test specimen.

Accessories, to be ordered separately:

1-KAB159-5 Connection cable with male connector MS3106PEMV and free ends, length 5 m

Pin assignment KD/STZ

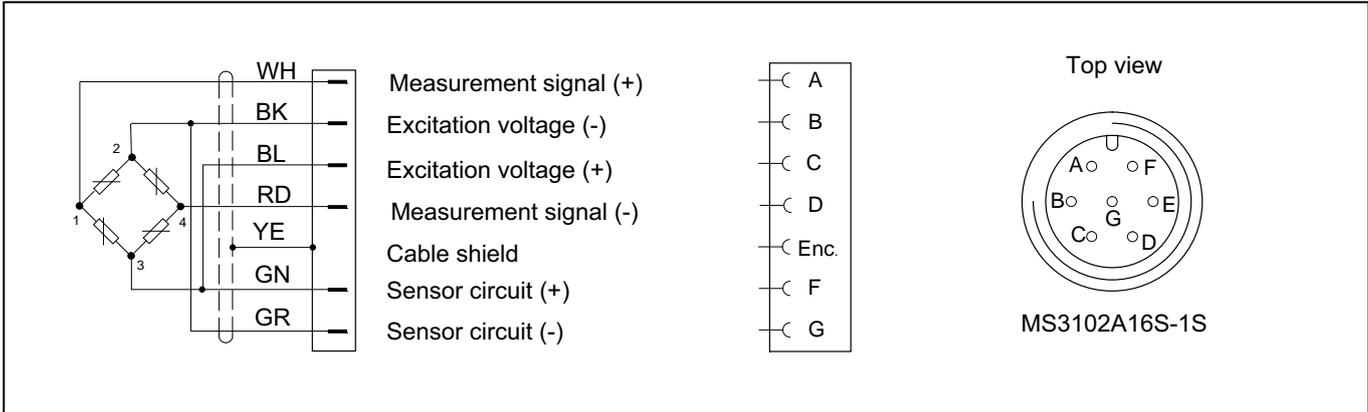

Subject to modifications.
 All product descriptions are for general information only. They are not to be understood as a guarantee of quality or durability.

Hottinger Baldwin Messtechnik GmbH
 Im Tiefen See 45 · 64293 Darmstadt · Germany
 Tel. +49 6151 803-0 · Fax +49 6151 803-9100
 Email: info@hbm.com · www.hbm.com

measure and predict with confidence

