

# Reliable force measurement

Force transducers for industrial and research applications



# Versatile in use, proven worldwide

## HBM always offers the right solution

### Full range of force measurement technology:

- Force transducers for use in production
- Force transducers for tests and experiments
- Highly precise reference force transducers for calibration


### Accumulated expertise:

- Decades of experience in the development of force transducers
- High-end strain gauge production at Darmstadt headquarters
- In-house mechanical manufacturing
- Calibrations from 5 N to 5 MN

### Extensive range of services offered by the leading international measurement technology expert:

- HBM expert knowledge on site anywhere in the world
- Individually customized advice, installation and start-up
- Training and seminars
- Calibration service
- Strain gauge installation

Everything about force measurement technology can be found at: [www.hbm.com/force](http://www.hbm.com/force)

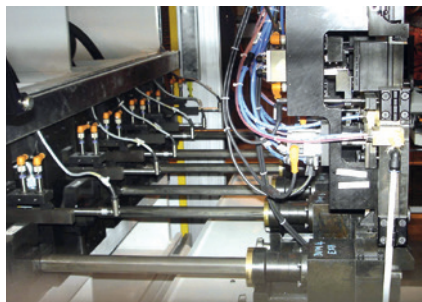

Reliable measurements thanks to HBM's decades of experience in diverse sectors of industry including aerospace, automotive or test stand construction.

- Input signal for actuator control
- Reliable measurement of forces applied
- High precision when used in functional testing
- Endurance strength offering high reserves



Automation ensures uniformly high quality, fast cycle times and reliable processes.

- Utilize custom-made digital electronics to monitor: Press-fit processes, force trends in functional testing, forming processes, web tension measurement, etc.
- Input signal for control
- Reliable measurement of forces applied in the production environment
- Functional testing



**Experiments  
and tests**

**Production  
monitoring**

**Test benches  
and material  
testing**

**Calibration**



International quality guidelines require that material and product properties are checked for safety.

- Testing the required specifications in various types of testing machines and test benches
- Measurement of torques on brakes and engine test benches via lever arms



Precise measurement using HBM reference transducers is guaranteed through traceability to National Standards.


- Verification of production and measurement tools
- Reliable and precise calibration of material testing machines and other force sensors
- High-precision measurements in international force comparison
- HBM sensors as reference in your calibration machine

# HBM technology at a glance

## Robust, compact and easy to install

Force transducers have an important role to play in industrial process control. Force responses or peak forces are monitored inline for fitting or compression processes and provide instant information about quality.

- Robust force transducers that are insensitive to lateral force
- Compact designs
- Easy mounting
- TEDS transducer identification
- Force transducers based on strain gauge technology and the piezoelectric effect

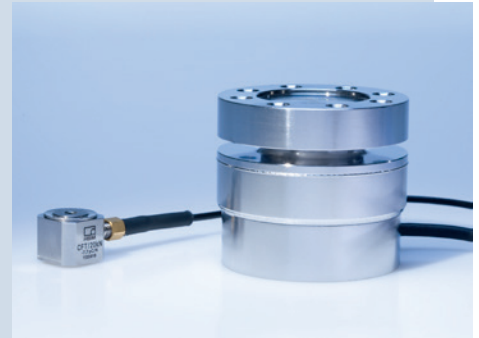

## High endurance and precision

Component optimization always raises questions about part durability when reduced use is made of materials. HBM's force measurement technology meets the following requirements:


- Endurance strength
- Vast safety reserves
- High oscillation width (tensile and compressive loading)
- Good reproducibility and reliably high accuracy
- Redundant measuring bridges



## Maximum precision from HBM

Ultimate accuracy is required for force measurement in national institutes and accredited calibration laboratories. HBM precision force transducers for calibration meet these high standards thanks to years of varied experience and close contact with customers:

- Technical specifications exceed the requirements of the ISO 376 standard for the top Class 00 by a factor of 10
- Outstanding long-term stability
- Perfect interaction with HBM's DMP41 and ML38B high-precision amplifiers






# Your satisfaction is our commitment

## Plug and Measure

Plug and Measure is to measurement technology what Plug and Play is to computers: technology that makes getting started with your measurement easy. Important characteristics of the transducer are stored internally in the form of an electronic data sheet called TEDS. The measuring amplifier is able to load this data and convert it automatically into the correct settings. This allows the user to start measuring immediately with the right settings for the unit without having to make any adjustments.


- Ease of use in compliance with international standards (IEEE)
- Minimal time required for measurement preparation
- Increased safety, as errors from manually setting up the amplifier are avoided

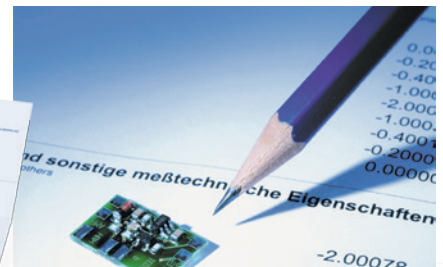



## Customized sensors providing maximum quality

We develop and manufacture customized transducers for your order and to your specifications. Custom-made for you, with the experience and competence of the market leader.

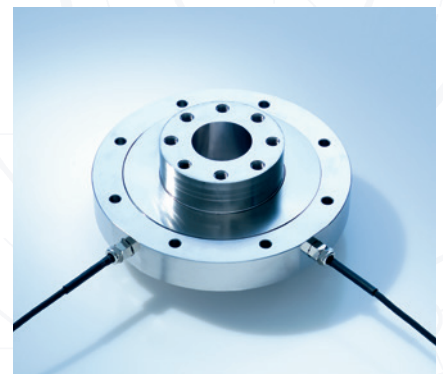








- Flexible design and quantities, with or without an integrated amplifier – it's your choice
- Fast development and production – rapid engineering and rapid prototyping provide quick results
- Reliable through calibration, ISO9001 certification, 2-year-warranty and HBM expertise right from the start of your project

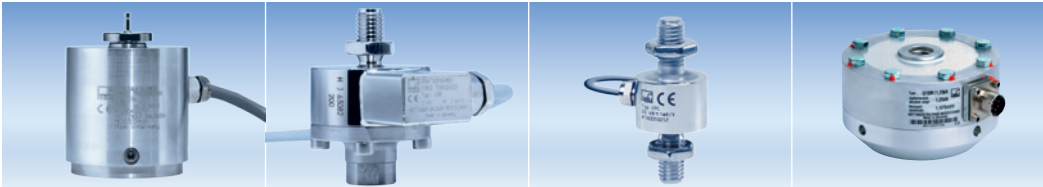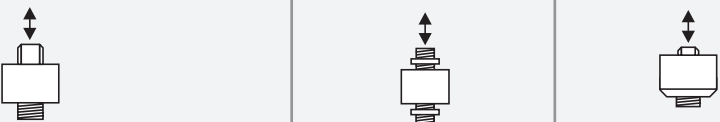




# Sensors for industrial applications

				
Force transducers	U1A	U2B	U9C	U10M
Force direction				
Design				
Linearity error (%)	0.1	0.2	0.2	0.03 - 0.06
Capacity from ... to				
N	10 N 50 N	500 N 200 kN	50 N 50 kN	1.25 kN 500 kN
kN				
MN				1 MN*
Special features	<ul style="list-style-type: none"> <li>Force transducer for small tensile and compressive forces</li> <li>Overload protection</li> </ul>	<ul style="list-style-type: none"> <li>Versatile in use</li> <li>Flexible configuration</li> <li>Industry standard</li> </ul>	<ul style="list-style-type: none"> <li>Miniature force transducer for tensile and compressive forces</li> <li>Hermetically encapsulated</li> <li>High cut-off frequency</li> </ul>	<ul style="list-style-type: none"> <li>High dynamic oscillation width</li> <li>Highly precise</li> <li>Double bridge design and many other options available</li> <li>TEDS</li> </ul>

HBM force transducers reliably measure static and dynamic tensile and compressive loading. This page shows you the easy-to-mount, compact and robust multi-purpose industrial versions for your special applications in testing, monitoring and production.



					
U10S	S2M	S9M	U3	U5	U93
Tension and compression					
					
0.03 – 0.06	0.02	0.02	0.2	0.2	0.5
	10 N 1 kN		500 N 100 kN		
1.25 kN 450 kN		500 N 50 kN		100 kN 500 kN	1 kN 50 kN
 900 kN*					
<ul style="list-style-type: none"> <li>High dynamic oscillation width</li> <li>Highly precise</li> <li>Double bridge design</li> <li>TEDS</li> <li>Threaded connector to UNF standard</li> </ul>	<ul style="list-style-type: none"> <li>Overload protection in the tensile and compressive directions</li> <li>Highly precise</li> <li>Highly flexible cable, suitable for drag chains</li> <li>High degree of protection (IP67)</li> </ul>		<ul style="list-style-type: none"> <li>Insensitive to lateral forces</li> <li>Extremely robust</li> <li>Easy-to-mount flange connection</li> </ul>		<ul style="list-style-type: none"> <li>Highly compact</li> <li>Robust</li> <li>TEDS</li> <li>Miniature force transducer</li> <li>Insensitive to lateral forces</li> <li>Easy-to-mount flange connection</li> </ul>

# Sensors for industrial applications

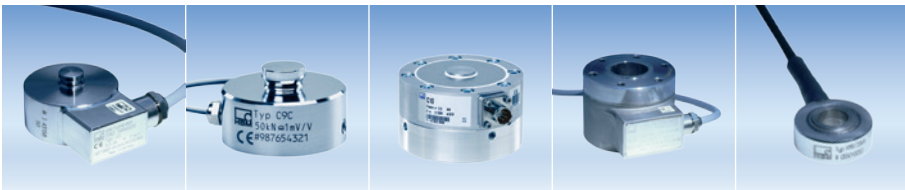					
Force transducers	C2	C9C	C10	C6A	KMR
Force direction	Compression				
Design					
Linearity error (%)	0.2	0.2		0.5	1
Capacity from ... to					
N		50 N ...			
kN	500 N ... 200 kN	50 kN	2 kN ... 1MN	200 kN ... 5MN	20 kN ... 400 kN
MN					
Special features	<ul style="list-style-type: none"> <li>Hermetically encapsulated</li> <li>Low overall height</li> <li>High natural frequency</li> <li>Flexible configuration</li> </ul>	<ul style="list-style-type: none"> <li>Miniature force transducer</li> <li>Hermetically encapsulated</li> <li>High cut-off frequency</li> </ul>	<ul style="list-style-type: none"> <li>Highly precise</li> <li>Large output signal</li> <li>Many options (double bridge, TEDS, etc.)</li> <li>Low temperature dependence of the zero point</li> </ul>	<ul style="list-style-type: none"> <li>High capacities, with small dimensions</li> <li>Continuous internal bore</li> </ul>	<ul style="list-style-type: none"> <li>Measuring washer based on strain gauge technology</li> <li>Hermetically encapsulated</li> </ul>



# Force calibration options at HBM

Accredited calibration					Working standard calibration				
 possible steps <div>4 6 8 10</div> <div>A</div>					 possible steps <div>6 10</div> <div>B</div>				
Measuring range									
5 N					X	X	X	■ ■	
10 N	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
20 N	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
50 N	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
100 N	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
200 N	X	X	x	■ ■ ■ ■	X	X	X	■ ■	
500 N	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
1 kN	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
2 kN	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
5 kN	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
10 kN	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
20 kN	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
50 kN	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
100 kN	X	X	x	■ ■ ■ ■	X	X	X	■ ■	
200 kN	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
500 kN	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
1 MN	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
2 MN	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
5 MN	X	X	X	■ ■ ■ ■	X	X	X	■ ■	
Best possible uncertainty: > 0.005%									


■ Standard offer  
■ Not available

8 10 Acc. to ISO 376


A 4+2 increasing/decreasing series

B 1+1 increasing/decreasing series




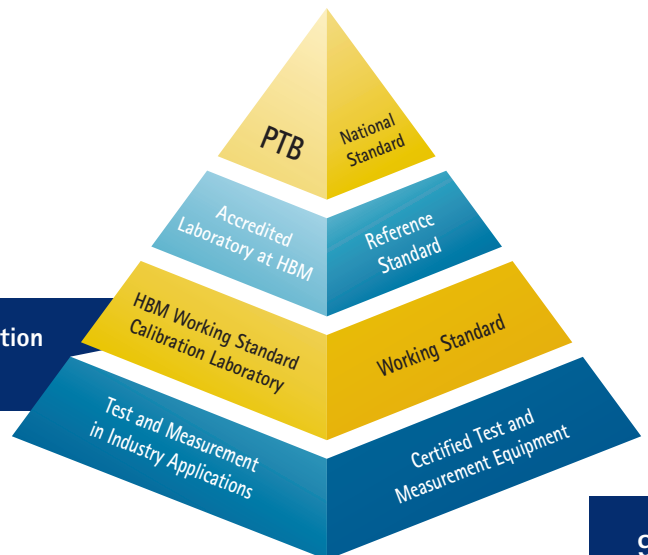


All the calibration quantities and options of the HBM calibration laboratory can be found at: [www.hbm.com/calibration](http://www.hbm.com/calibration)



# Reference force transducers for high-precision calibration tasks

Reference force transducers	U15	Top Transfer	Z30A	Z4A
Force direction	Tension and compression			
Design				
Class to ISO 376	0.5	Better than 00	0	0
Capacity from ... to				
N		100 N	50 N	
kN	2 kN	500 kN	10 kN	20 kN
MN	1 MN			500 kN
Special features	<ul style="list-style-type: none"> <li>■ Precision force transducer</li> <li>■ For a wide range of calibration tasks in industry and research</li> <li>■ TEDS</li> <li>■ Numerous options available</li> </ul>	<ul style="list-style-type: none"> <li>■ Transfer standards with maximum precision</li> <li>■ Greatly exceeds the requirements of class 00</li> <li>■ Suitable for international comparisons</li> </ul>	<ul style="list-style-type: none"> <li>■ Precision measurements of small forces</li> <li>■ For use as a calibration standard</li> <li>■ TEDS</li> </ul>	<ul style="list-style-type: none"> <li>■ Precision measurements of forces up to 500 kN</li> <li>■ Force measurements with high precision</li> <li>■ For use as a calibration standard</li> </ul>

HBM reference force transducers are the reliable basis for traceability to national standards and for precision measurements comparable to international standards.

			
C18	KD	KDB	STZ
Compression			Tensile
			
0.5	0.5	0.5	0.5
10 kN			
			600 kN
			1 MN
5 MN	1 MN	2 MN	
5 MN	5 MN		
<ul style="list-style-type: none"> <li>■ Compact, low design</li> <li>■ Ideal for calibration tasks</li> <li>■ Robust cables</li> </ul>	<ul style="list-style-type: none"> <li>■ Special force transducer for verifying material testing machines</li> <li>■ With measurement of bending moment</li> </ul>	<ul style="list-style-type: none"> <li>■ Special force transducer for verifying material testing machines</li> <li>■ With measurement of bending moment</li> </ul>	<ul style="list-style-type: none"> <li>■ Special force transducer for verifying material testing machines</li> <li>■ With measurement of bending moment</li> </ul>

# Strain transducers for indirect force measurement

Screw-on strain sensors for indirect force measurement. With or without an integrated amplifier, piezoelectric or based on strain gauges. For easy mounting, robust design.

Sensor	SLB700A	SLB700A/06VA	CST
Principle of measurement	SG, passive	SG, with integrated amplifier	Piezoelectric strain sensor
Mounting	Four M6 screws	Four M6 screws	One M6 screw
Strain ranging from ... to $\mu\text{m}/\text{m}$	<div>-500 <math>\mu\text{m}/\text{m}</math></div> <div>+500 <math>\mu\text{m}/\text{m}</math></div>	<div>-500 <math>\mu\text{m}/\text{m}</math></div> <div>+500 <math>\mu\text{m}/\text{m}</math></div>	<div>-300 <math>\mu\text{m}/\text{m}</math></div> <div>+300 <math>\mu\text{m}/\text{m}</math></div>
Special features	<ul style="list-style-type: none"> <li>Easy mounting</li> <li>Stainless steel materials</li> <li>6 m or 12 m cable available</li> <li>Robust, tested design</li> </ul>	<ul style="list-style-type: none"> <li>Mechanically compatible with the passive SLB700A</li> <li>Integrated amplifier, optionally 4...20 mA or 0...10 V output</li> <li>Teach function for practice-oriented calibration process</li> </ul>	<ul style="list-style-type: none"> <li>High sensitivity</li> <li>Easy mounting</li> <li>Compact dimensions</li> <li>With integrated cable</li> </ul>



Strain transducers are mounted onto the object to be monitored. The forces acting on the measurement object generate proportional strain that is reliably measured with strain sensors.

The SLB700A/06VA with integrated electronics offers a calibration method using digital switching inputs. Independent of the strain resulting from the force to be measured in your component part, the greatest possible output signal will always be present at the output of the integrated amplifier.

This sensor requires calibration prior to measurement.

# Transducers for industrial applications









The extremely compact HBM force transducers based on the piezoelectric principle measure quasi-static and dynamic forces where space is a constraint and measuring bodies with high stiffness are used. Compact dimensions, stainless steel materials and an extensive range of accessories facilitate integration.

Force transducers	CFT	CMC	CFW	CLP
Force direction	Compression			
Design				
Linearity error (%)	1	1	1	1
Capacity from ... to				
N				
kN	5 kN 120 kN	5 kN 120 kN	20 kN 700 kN	7 kN 80 kN
MN				
Special features	<ul style="list-style-type: none"> <li>Calibrated piezoelectric force transducers</li> <li>High stiffness</li> <li>Easy-to-mount flange connections</li> </ul>	<ul style="list-style-type: none"> <li>Measuring chain calibrated in two ranges</li> <li>Charge amplifier included in the calibration</li> <li>High bandwidth</li> </ul>	<ul style="list-style-type: none"> <li>Compact force washers</li> <li>High stiffness</li> <li>Welded construction</li> </ul>	<ul style="list-style-type: none"> <li>Extremely flat force transducer</li> <li>With integrated cable</li> <li>Welded construction</li> </ul>

# For perfect interaction

HBM sensors and amplifiers are perfectly matched.  
The ideal system solution for easy, fast and reliable measurement results.

Find the right amplifier system for your specific measurement task:

Application	Product	Interface	Special features
<p>Amplifier systems for force measurement in production, monitoring, quality assurance, machine monitoring and control</p>	 <b>PMX</b>	Ethernet, Profinet, EtherCAT, $\pm 10V$	Modular measuring amplifier system for production and industrial test benches
	 <b>PME</b>	Profibus, CAN, Interbus S, $\pm 10V$ , 0/4...20 mA	Industrial measurement electronics with fieldbus connection
	 <b>MP85</b>	Ethernet, Profibus, CAN	All-rounder for fitting, testing and press fitting processes
	 <b>DigiClip</b>	Profibus, CAN, DeviceNet	Modular measuring amplifier system with fieldbus connection for industrial environments
	 <b>AED</b>	RS485, Profibus, CAN, DeviceNet	Digital transducer electronics with field housing
	 <b>Clip</b>	$\pm 10V$ , 0/4...20 mA	Electronics for industrial measurement tasks
	 <b>CMD</b>	Ethernet, $\pm 10V$	Digital charge amplifier for piezoelectric sensors
	 <b>CMA</b>	$\pm 10V$	Analog charge amplifier for piezoelectric sensors






Production monitoring  
Quality assurance



Monitoring





Application	Product	Interface	Special features
Amplifier systems for force measurement in research, development and test bench construction	 <b>QuantumX</b>	Ethernet, EtherCAT, CAN, $\pm 10V$	Measuring amplifier system for universal measurement data acquisition
	 <b>MGCplus</b>	Ethernet, USB, Profibus, Canbus, $\pm 10V$	Universal and scalable measuring amplifier system for laboratory and test bench
	 <b>SOMAT</b>	Ethernet, CAN	Rugged, mobile data acquisition systems
	 <b>Genesis</b>	Ethernet, $\pm 10V$	Data logger with high sampling rate
	 <b>DMP41</b>	Ethernet, USB	Digital precision measuring instrument – used around the world by nearly all national testing facilities

Professional software is the key to successful test and measurement.

Software	Product	Short description
Test and measurement software	 <b>catman</b>	Professional software for data acquisition and processing

[www.hbm.com](http://www.hbm.com)

**HBM Test and Measurement**

Tel. +49 6151 803-0

Fax +49 6151 803-9100

[info@hbm.com](mailto:info@hbm.com)

**US Contact**

HBM, Inc.

Tel. +1 (800) 578 4260

[info@usa.hbm.com](mailto:info@usa.hbm.com)

measure and predict with confidence

